

Desco 237220. Conductive PCB Rack, 215mmx582mm


Artikel-Nr. DESCO 237220

Hersteller Desco

DESCO 237220. Conductive PCB Rack, 215mm x 582mm

TECHNISCHE DATEN

Ausführungsklasse	TEC
Gewicht	1.112 kg
Zolltarifnummer	39231090

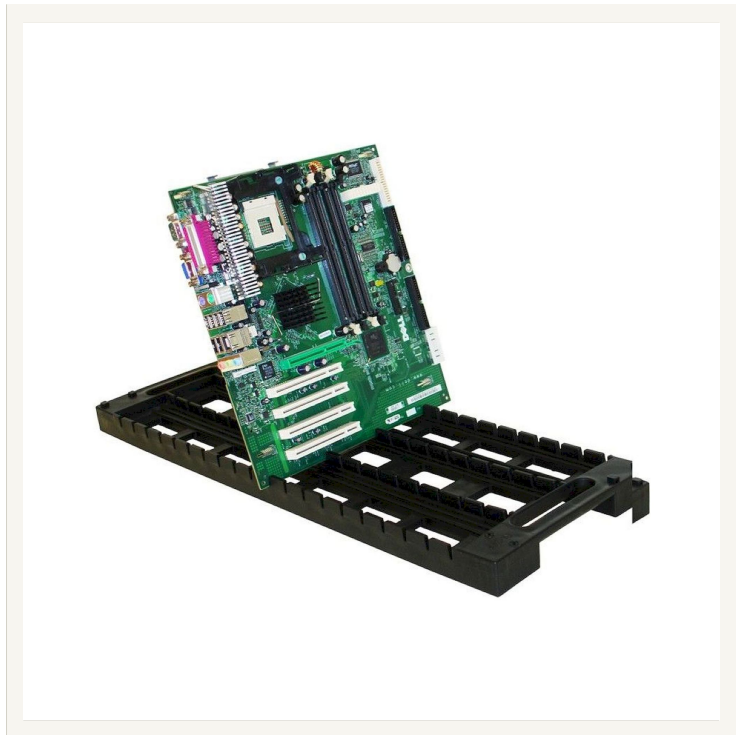

NORMEN & KONFORMITÄT

ESD sicher EN 61340-5-1

BESCHREIBUNG

- Moulded from a conductive thermoplastic compound based on polypropylene copolymer with carbon black and reinforced with mica flake.
- Designed to protect CMOS loaded boards in storage.
- Recommended maximum operating temperature is 85°C.
- Open carrying handles.
- Measurements: 215mm x 582mm.
- Weight: 1.2kg.
- 20 slots with easy-to-load angle: 3mm x 8mm on a 15mm pitch

"Tools intended for use within the EPA [ESD protected area] shall, as far as is practicable, be so constructed that they do not generate or hold an electrostatic charge

All tools and machinery, for example electrical, mechanical or pneumatic, shall be so constructed that any non-insulating part of the tool or machine which may touch an ESDS [ESD sensitive items] shall be at EPA ground potential." [EN 61340-5-1 clause 5.2.10 Tools, machinery, dispensers and test equipment]

Technical information

- - Conductive PCB Rack, 215mm x 582mm