


## MAXI HD TRANSPORT TROLLEY WITH POLYAMIDE WHEELS RO 86.4 HD PA FE

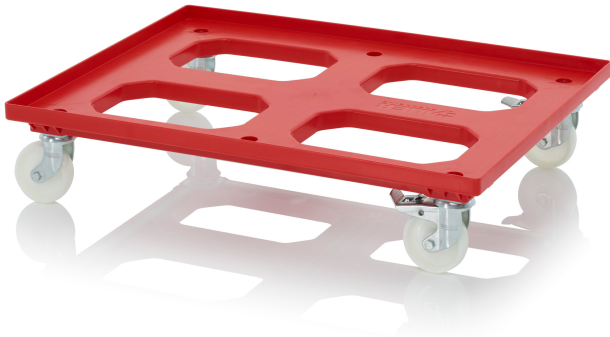

### The large stackable version

AUER Packaging's new generation of Maxi transport trolleys can not just carry large plastic containers with basic dimensions of 80 cm x 60 cm: The board has also been designed that two containers measuring 60 cm x 40 cm or four containers measuring 40 cm x 30 cm can be safely placed next to each other.

Another new option: In addition to the steel tube reinforcement, which also features in the basic version, an ultra-strong heavy duty version with an additional pair of swivel castors is available. Thanks to the sturdy support in the middle, the Maxi transport trolley with six castors can handle a load capacity of 500 kg.

- Optionally available with 4 or 6 castors
- Extremely impressive load capacity of 250 kg or 500 kg
- Aligned with Euro dimensions
- High-quality, smooth-rolling wheels



### DETAILS

|                                       |                                                        |                        |                              |
|---------------------------------------|--------------------------------------------------------|------------------------|------------------------------|
| <b>Outer dimensions<br/>L x W x H</b> | 81.68 x 61.68 x 17.69 cm                               | <b>Weight</b>          | 7.16 kg                      |
| <b>Design Castors</b>                 | 2 steering castors, 2 steering castors with wheel stop | <b>Colour</b>          | traffic red similar RAL 3020 |
| <b>Material Castors</b>               | PA                                                     | <b>Stacking height</b> | 15.3 cm                      |
| <b>Ø Castors</b>                      | 10 cm                                                  |                        |                              |

### Identified risks and safety information

The following potential risks have been identified when using the product:

- Material breakage due to overloading or incorrect handling with an associated risk of cuts\*<sup>1</sup>
- Risk of injury due to improper handling or heavy lifting
- Risk of slipping on uneven or wet surfaces
- Risk of crushing or pinching fingers and hands\*<sup>2</sup>

### Measures for minimising risk

To minimise the risks mentioned, the following safety measures should be observed:

- Always observe the maximum load limit of the product. If this is not specified in the product details, it should be evaluated independently.
- Use suitable lifting and transport equipment.
- Ensure that the product is placed on a stable and level surface.

### Material and recycling information

The product is made of recyclable Material and should be disposed of in accordance with local recycling guidelines.

\*<sup>1</sup> Appendix: Risk of cuts

Overloading or damage to the material can result in sharp edges that pose a risk of cuts. To minimise this risk, the following precautions should be taken:

- Never exceed the maximum load limit.
- Check the product regularly for signs of damage or cracks and do not use it if such defects are present.
- Wear suitable protective gloves when handling the damaged product to protect your hands from sharp edges.

\*<sup>2</sup> Appendix: Crush risk

There is a risk of crushing or trapping fingers and hands when using the product, especially when stacking, folding or unfolding the product. This risk increases if the product is operated improperly or hastily. To reduce this risk, the following measures should be observed:

- Keep your hands and fingers away from the stacking, folding or collapsing mechanisms while handling the product.
- Carry out all movements slowly and in a controlled manner to prevent the product from closing unintentionally.



- If necessary, use suitable protective gloves to provide additional protection for your hands.