
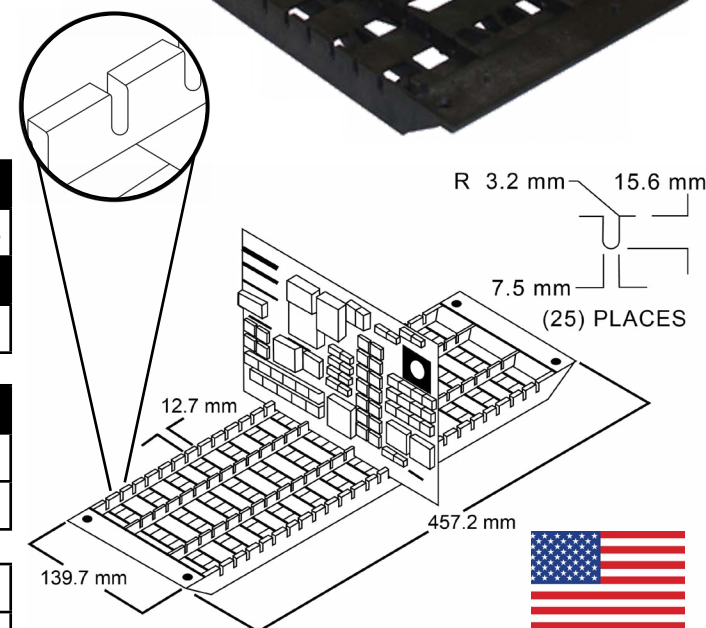


- A. This Desco Europe PCB rack is moulded of a static dissipative thermoplastic compound based on polyurethane copolymer with carbon black, and reinforced with mica flake.
- B. These racks are designed to dissipate static charges from boards with ESD sensitive devices.
- C. Recommended maximum operating temperature is 85°C.
- D. Open carrying handles.
- E. Measurements: 140 mm x 465 mm.
- F. Weight: 0.4 kg.
- G. 25 slots measure 3.2 mm x 7.5 mm on a 15.6 mm pitch.

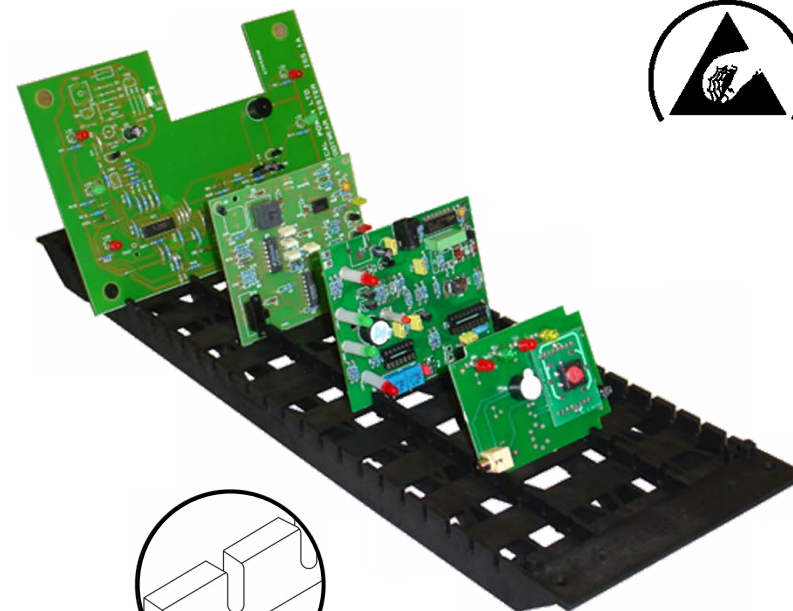

Made in the
United States of America

Standard Document

ANSI-ESD S541-2019	Packaging Materials For the Protection of Electrostatic Discharge Susceptible Items
--------------------	---

Electrical Properties	Test Method	Standard Requirement	Typical Range
Surface Resistance	ANSI/ESD STM11.13	1.0 x 10 ⁴ to 1.0 x 10 ¹¹ Ohms	1.0 x 10 ⁴ to 1.0 x 10 ⁷ Ohms

Mechanical Properties	Test Method	Standard Requirement	Typical Range
Tensile Strength @ Break	ASTM D-638	N/A	3600 (25) psi (MPa)
Tensile Elongation @ Break	ASTM D-638	N/A	6-9 %

ITEM	DESCRIPTION
237225	Rack PCB, Dissipative, 140 mm X 465 mm

Unless otherwise noted, tolerance $\pm 10\%$
Specifications and procedures subject to change without notice.

RACK PCB, DISSIPATIVE, 140MM X 465MM

DESCO EUROPE

DESCO EUROPE
2A DUNHAMS LANE, LETCHWORTH GARDEN CITY,
HERTFORDSHIRE, SG6 1BE, UK
PHONE: +44 (0) 1462 672005
E-MAIL: Service@DescoEurope.com, INTERNET: DescoEurope.com

Drawing Number
237225

DATE:
February
2026