
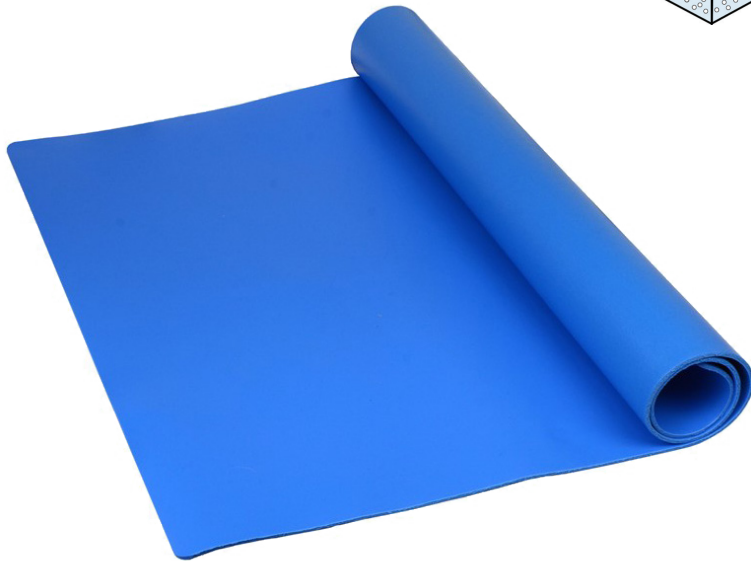


# Premium 3-Layer Vinyl Worksurface Mat

This three-layer vinyl material provides excellent electrical properties. The top layer is made from a tough, easy-to-clean dissipative vinyl. The center layer, a highly conductive metal scrim, moves the charge from the surface to ground quickly. The bottom layer is a durable, non-skid, cushion of dissipative foam. Compatible with constant monitors. Available in rolls, mats, and mats with a ground cord. Meets ANSI/ESD S20.20 worksurface required limits and recommendation of ANSI/ESD STM4.1.

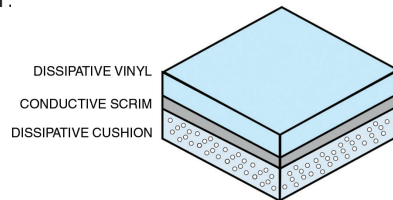

\*Color, texture and thickness may vary between lots and mills.

#### RoHS, REACH and Conflict Minerals, Statement

See the Desco Industries RoHS, REACH, and Conflict Minerals Statement: [DescoIndustries.com/ROHS3.aspx](https://www.staticcontrol.com/ROHS3.aspx)

#### See the SCS Limited Warranty:

[StaticControl.DescoIndustries.com/Limited-Warranty.aspx](https://www.staticcontrol.com/Limited-Warranty.aspx)

Specifications and procedures subject to change without notice.

# SCS



Made in the  
United States of America

| Properties               | Typical Value                         | Test Method                                              |
|--------------------------|---------------------------------------|----------------------------------------------------------|
| Thickness*               | 0.125" (3.2 mm) $\pm$ 10 %            |                                                          |
| Color*                   | Blue                                  |                                                          |
| Hardness                 | 75 $\pm$ 5 Shore A                    |                                                          |
| Resistances*             |                                       |                                                          |
| Surface to Ground (Rtg)  | < 1 x 10 <sup>9</sup> ohms            | ANSI/ESD STM4.1 & ESD TR53<br>ANSI/ESD STM4.1 & ESD TR53 |
| Surface to Surface (Rtt) | < 1 x 10 <sup>9</sup> ohms            |                                                          |
| Tolerance                |                                       |                                                          |
| Mat Kit                  | Width +/- 0.250"<br>Length +/- 0.250" |                                                          |
| Rolls                    | Width +/- 0.250"<br>Length +12" / -1" |                                                          |

## Mat Kit Item Numbers

| Size                      | Blue                         |
|---------------------------|------------------------------|
| 24" x 48" (0.6 m x 1.2 m) | <a href="#">TM2448L3BL-L</a> |

## Table Mat Includes:

1 Table Mat, size as specified

1 [LPCGC151M](#) 15' (4.6 m) Low-Profile Common Ground Cord

2 [3050](#) Female 3/8" Snaps (installed)

[**DISCLAIMER:** 3050 snap must be used to connect the mat to ground and continuous monitors.]

## Mat Roll Item Numbers

| Size                        | Blue                         |
|-----------------------------|------------------------------|
| 2' x 50' (0.6 m x 15.2 m)   | <a href="#">TM24600L3BL</a>  |
| 2.5 x 50' (0.8 m x 15.2 m)  | <a href="#">TM30600L3BL</a>  |
| 2.5 x 100' (0.8 m x 30.4 m) | <a href="#">TM301200L3BL</a> |
| 3' x 50' (0.9 m x 15.2 m)   | <a href="#">TM36600L3BL</a>  |
| 3' x 100' (0.9 m x 30.4 m)  | <a href="#">TM361200L3BL</a> |

## Hardware not included

**Grounding:** This material must be properly grounded for optimum electrical performance. See [Grounding Cords](#).

## PREMIUM QUALITY 3-LAYER VINYL WORKSURFACE MAT

926 JR Industrial Drive, Sanford, NC 27332  
WEB SITE: [StaticControl.com](https://www.staticcontrol.com)  
PHONE: EAST: (919) 718-0000 | WEST: (909) 627-9634

**DRAWING  
NUMBER**  
TM PREMIUM

**DATE**  
August  
2025