


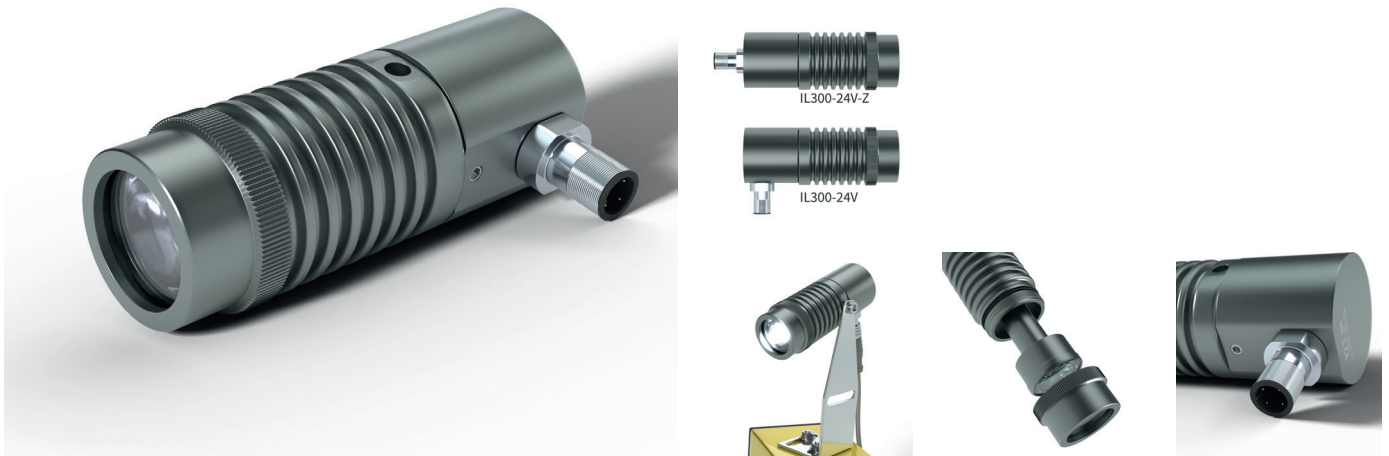

Machine Lamp

IL300-24V

**MADE
IN
GERMANY**

- Fast change of the illuminants with innovative modul-LED® concept
- With screw caps and protective glasses for high demands
- Flicker-free lighting thanks to optimized electronic
- Ideal to use in industry and science
- Brightness adjustable at the PWM trigger
- Power is supplied directly at the machine (24 V)
- Compact and stable aluminium housing



Technical Data

Illuminant	LED Module 28 mm
LED Type	3 W Power LED
Brightness control	yes, by PWM trigger
Operating voltage	24 V DC
Protection class	III
IP code	IP67
Connection	M12 plug
Length	93,4 mm
Diameter	35 mm
Protective glass	borosilicate glass
Material	anodized aluminium
Color	titanium
Weight	approx. 150 g

Versions

100-009363	IL300-24V	with M12 connector (4-pole), connection 90 degree
100-012629	IL300-24V-Z	with M12 connector (4-pole), connection straight line

Accessories

100-006463	modulLED28-s PW	pure white (5.700 K), Spot (6°)
100-006467	modulLED28-s NW	natural white (4.000 K), Spot (6°)
100-006471	modulLED28-s WW	warm white (3.000 K), Spot (6°)
100-005942	modulLED28-s R	red (625 nm), Spot (6°)
100-005943	modulLED28-s G	green (528 nm), Spot (6°)
100-005944	modulLED28-s B	blue (470 nm), Spot (6°)
100-010725	modulLED28-s A	amber (590 nm), Spot (6°)

Accessories

100-006464	modulLED28-f PW	pure white (5.700 K), Flood (25°)
100-006468	modulLED28-f NW	natural white (4.000 K), Flood (25°)
100-006472	modulLED28-f WW	warm white (3.000 K), Flood (25°)
100-005638	modulLED28-f R	red (625 nm), Flood (25°)
100-005641	modulLED28-f G	green (528 nm), Flood (25°)
100-005642	modulLED28-f B	blue (470 nm), Flood (25°)
100-010726	modulLED28-f A	amber (590 nm), Flood (25°)
100-006465	modulLED28-d PW	pure white (5.700 K), Diffuse (40°)
100-006469	modulLED28-d NW	natural white (4.000 K), Diffuse (40°)
100-006473	modulLED28-d WW	warm white (3.000 K), Diffuse (40°)
100-005945	modulLED28-d R	red (625 nm), Diffuse (40°)
100-005946	modulLED28-d G	green (528 nm), Diffuse (40°)
100-005947	modulLED28-d B	blue (470 nm), Diffuse (40°)
100-010727	modulLED28-d A	amber (590 nm), Diffuse (40°)
100-006466	modulLED28-l PW	pure white (5.700 K), Line (8° × 30°)
100-006470	modulLED28-l NW	natural white (4.000 K), Line (8° × 30°)
100-006474	modulLED28-l WW	warm white (3.000 K), Line (8° × 30°)
100-005948	modulLED28-l R	red (625 nm), Line (8° × 30°)
100-005949	modulLED28-l G	green (528 nm), Line (8° × 30°)
100-005950	modulLED28-l B	blue (470 nm), Line (8° × 30°)
100-010728	modulLED28-l A	amber (590 nm), Line (8° × 30°)

Accessories

100-004146	Protective Glass Set	for IL3 and IL300 (incl. O-Rings)
100-004422	IR Protective Filter	for IL300 (1064 nm)
100-012397	Mounting bracket	for IL300, IL100-24V and IL300-24V
100-012397	Mounting bracket	for IL300, IL100-24V and IL300-24V
100-006332	L-Bracket	for IL300, IL100-24V and IL300-24V
100-006333	U-Bracket	
100-006334	Ball Joint	
100-006337	Connection cable	3 m, M12, 5-pole, 3 free wires
100-011340	Connection cable	5 m, M12, 5-pole, 3 free wires