Surface-mounted luminaire MACH LED PLUS.seventy

113045000-00580702

Waldmann
LIGHT FOR BETTER RESULTS



Serie 763 4pol (A cod)

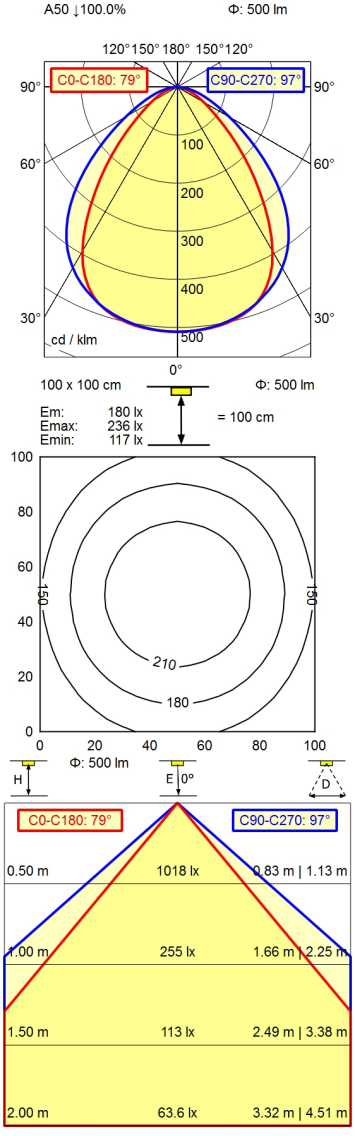

Connected load	18 - 30 V; DC
Work equipment	Without
Power consumption	approx. 5 W
Luminous flux	approx. 500 lm
Luminous efficiency [1]	approx. 100 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 5.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; Symmetric; approx. 100 %
Beam angle	80 °
Glare control	optical film
Light source	LED
Chromaticity tolerance LED	< 4 SDCM
At-risk group	RG0/1
Luminance (L65)	≤ 13.000 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 22
System of protection/Class	IP 67; III
Technology	Switchable
Operation	External
Housing	Aluminium; Anodised; Aluminium coloured anodised
Light source cover	Borosilicate; Clear
Mains lead	Built-in plug; Serie 763 4pol (A cod) M12
Design	mounted version
Fastening	L-angle; Clamp
Ambient temperature min./max	-10 °C; 60 °C
Weight without/incl. packaging	1,2; approx. 1,5 kg
Dimensions (dimensional drawing)	A=370 mm
Packaging dimensions	595 mm; approx. 90 mm; 85 mm
EAN	4013330043858
Special features	Eco equipment

[1] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 18/10/2026 H.Waldmann GmbH & Co. KG