

Strut Profile 40x40L 1N, Slot 10, ESD, Anodized Aluminum - Bosch Rexroth 3842529361


Item no. BRR-3842529361

Manufacturer Bosch Rexroth

Self-supporting strut profile 40x40L 1N in anodized aluminum with profile slot 10 and ESD properties. A core building element for frames, machine bases and workstation systems in the Bosch Rexroth assembly system. Supplied as a packaging unit of 20 profiles in standard length 6070 mm.

TECHNICAL DATA

Country of Manufacture	Germany
HS-Code	76042100
Length	6070 mm
Note	Gemäß der aktuellen Preisstruktur werden für Bestellungen von Profilen mit einer Länge von 1500 mm zusätzliche Kosten in Höhe von 80,00 Euro berechnet.
Weight	220 kg

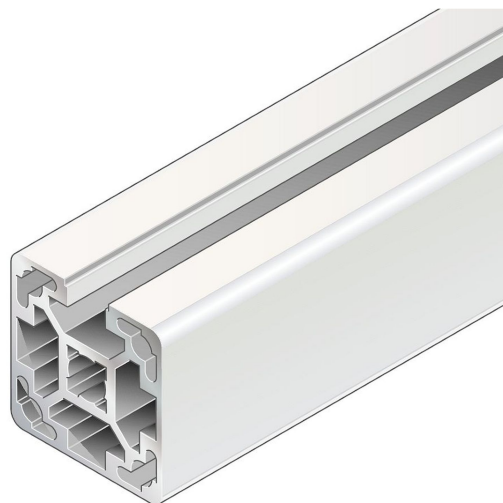

31395

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Bosch Rexroth strut profile 40x40L 1N is a self-supporting building element made of anodized aluminum for constructing frames, machine bases, guards and workstation systems. With profile slot 10 and a 40 mm modular dimension it combines flexibly with the accessories of the assembly system. Its ESD properties make it suitable for electrostatically protected areas.

- Self-supporting aluminum profile, anodized, natural finish
- Profile slot 10, one open slot, 40 mm modular dimension
- ESD-capable for electrostatically sensitive areas
- Supplied as a packaging unit: 20 profiles in standard length 6070 mm

TECHNICAL DATA

Cross-section	40x40L 1N
Profile type	1N
Dimensions	40x40
Modular dimension	40 mm

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Profile slot	10
Open slots	1
ESD	yes
Color	Natural
Material	Aluminum, anodized
Length [L]	6070 mm
Mass [m]	1.7 kg/m
Profile surface [A]	6.1 cm ²
Area moment of inertia in x-direction [Ix]	9.8 cm ⁴
Area moment of inertia in y-direction [Iy]	10.3 cm ⁴
Moment of resistance in x-direction [Wx]	4.7 cm ³
Moment of resistance in y-direction [Wy]	5.1 cm ³
Torsional moment of inertia [It]	6.9 cm ⁴
Moment of torsion resistance [Wt]	3.7 cm ³
Condition on delivery	Packaging unit in standard length
Delivery unit	20
Weight	220 kg
Recommended accessories	Cover cap 40x40