

T-nut slot 10, M4, steel galvanized, ESD - Bosch Rexroth 3842530281

Item no. BRR-3842530281

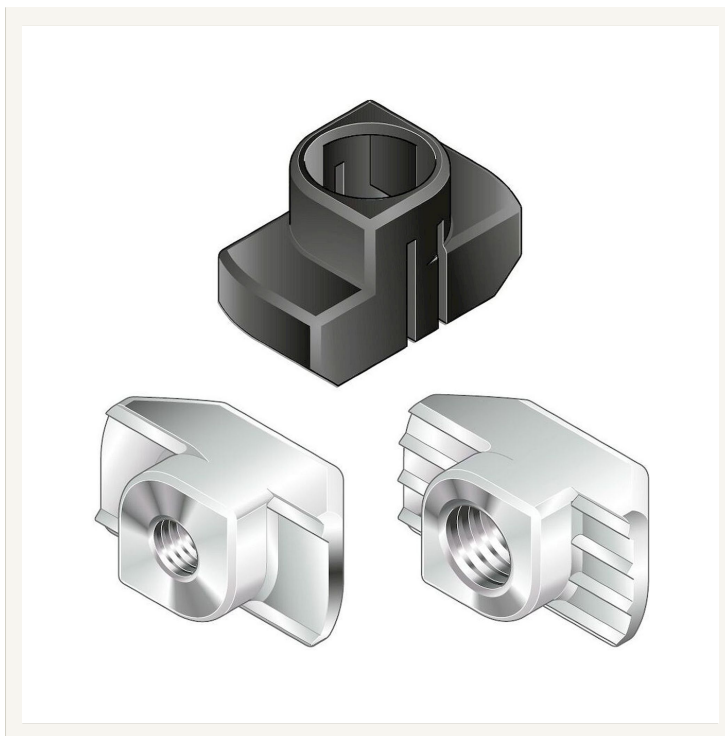
Manufacturer Bosch Rexroth

ESD-capable T-nut for retrofit fastening in the slot 10 of aluminium profiles. It is inserted into the groove and locked by a quarter turn for a positive fit. The insulating cap is required as an accessory for ESD protection.

TECHNICAL DATA

Ausführungsklasse **ESD (antistatic)**

HS-Code **73181692**

Weight **0.00765 kg**


STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The T-nut 10 M4 from Bosch Rexroth is used to add load-bearing screw connections at any point of profile slot 10. It is inserted lengthwise into the groove and locked with a quarter turn for a positive fit, so no open profile ends are needed. The ESD version suits electrostatically protected work areas.

- Retrofit mounting at any position along slot 10
- Positive locking by turning the nut inside the groove
- ESD-capable in combination with the insulating cap
- Galvanized steel for corrosion protection and high retention force

TECHNICAL DATA

Profile slot	10
Thread size	M4
ESD	yes
Material	Steel, galvanized
Min. groove retention (Fmin)	6000 N

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Max. groove retention (Fmax)	18000 N
Notice	Groove retention refers to M8
Required accessory	insulating cap
Packaging unit	100 pcs
Weight	0.00765 kg