

T-nut slot 8 M6, ESD, stainless steel - Bosch Rexroth 3842536602


Item no. BRR-3842536602

Manufacturer Bosch Rexroth

ESD-capable stainless steel T-nut for profile slot 8 with M6 thread. It is inserted into the slot and tightened by turning, allowing components to be fastened at any point of the strut profile after assembly.

TECHNICAL DATA

Ausführungsklasse	ESD (antistatic)
Country of Manufacture	China
HS-Code	73181639
Weight	0.004 kg

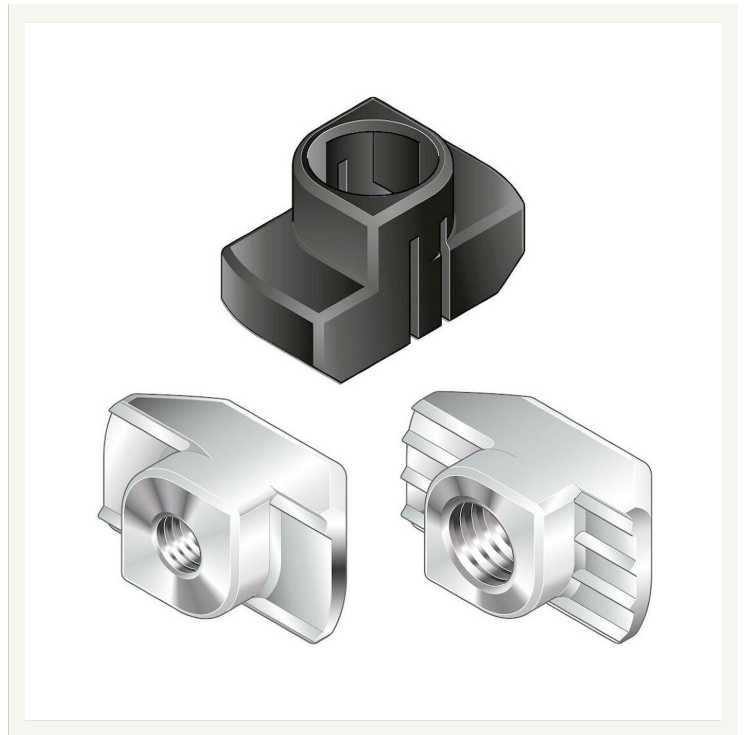

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The T-nut 8 M6 from Bosch Rexroth is used to fasten components into profile slot 8 of the aluminium strut profile system after assembly. It is inserted into the slot and locked in place with a quarter turn, so add-on parts can be mounted at any position without dismantling the profile. The ESD-capable stainless steel version suits areas requiring protection against electrostatic discharge.

- ESD-capable for electrostatic protected work areas
- Stainless steel for high corrosion resistance
- Groove retention up to 4000 N for secure connections

TECHNICAL DATA

Profile slot	8
Thread size	M6
ESD	yes
Material	Stainless steel
Groove retention [Fmax]	4000 N

Required accessories	insulating cap
Packaging unit	100 pieces
Weight	0.004 kg