

## Support Arm Joint 40x40 designLINE, ESD, Slot 10 - Bosch Rexroth 3842554428


Item no. BRR-3842554428

Manufacturer Bosch Rexroth

designLINE support arm joint for angle-adjustable connection of 40x40 support arm profiles. ESD-capable, made of painted diecast zinc in white aluminum (RAL 9006). For profile slot 10, rated up to 40 Nm bending moment.

### TECHNICAL DATA

|                        |          |
|------------------------|----------|
| Ausführungsklasse      | TEC      |
| Country of Manufacture | Germany  |
| HS-Code                | 83024900 |
| Weight                 | 0.696 kg |

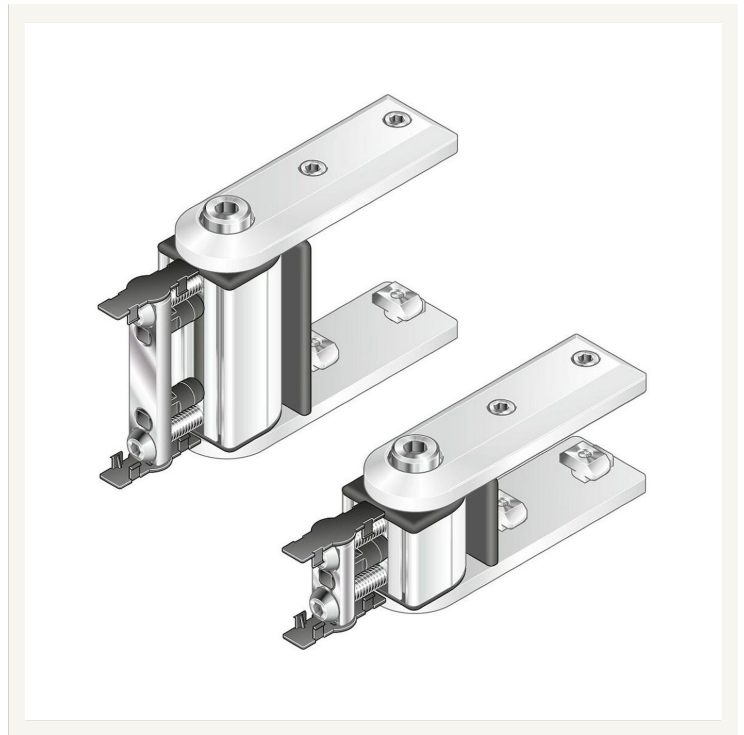

### STANDARDS & COMPLIANCE

ESD safe ISO4762

### DESCRIPTION

The 40x40 designLINE support arm joint connects support arm profiles and allows angle-adjustable positioning of operating, display and mounting elements. It is ESD-capable and therefore suited to workstations with electrostatic discharge requirements.

- Diecast zinc housing, painted in white aluminum (RAL 9006)
- Rated for a bending moment of up to 40 Nm
- Fits profile slot 10 on a 40 mm modular grid
- Supplied complete with cover caps, bolt connectors and fastening material

### TECHNICAL DATA

|                   |       |
|-------------------|-------|
| Profile slot      | 10    |
| Modular dimension | 40 mm |
| Dimensions        | 40x40 |
| Dimension [p]     | 40 mm |
| Bending moment 1  | 40 Nm |

|                           |                                                                                 |
|---------------------------|---------------------------------------------------------------------------------|
| <b>ESD</b>                | yes                                                                             |
| <b>Color</b>              | White aluminum (RAL 9006)                                                       |
| <b>designLINE</b>         | yes                                                                             |
| <b>Material</b>           | Diecast zinc, painted                                                           |
| <b>Fastening material</b> | 4x cylinder head screw ISO4762-M6x16, 4x T-nut groove 10 M6 (steel, galvanized) |
| <b>Cover cap</b>          | PP, signal gray                                                                 |
| <b>Scope of delivery</b>  | incl. cover caps, bolt connectors, fastening material (FS)                      |
| <b>Packaging unit</b>     | 1                                                                               |
| <b>Weight</b>             | 0.696 kg                                                                        |