

# Hinge Profile 40/45/50 ESD, Anodized Aluminum, Slot 10, L=3000 mm - Bosch Rexroth 3842543372


Item no. BRR-3842543372

Manufacturer Bosch Rexroth

Hinge profile for self-assembly of removable or non-removable hinges on aluminum profiles in sizes 40, 45 and 50. ESD-capable anodized aluminum with centering slots that act as a drill guide. Suitable for doors with profile frames or solid surface elements, opening left or right.

## TECHNICAL DATA

|                        |                  |
|------------------------|------------------|
| Ausführungsklasse      | ESD (antistatic) |
| Country of Manufacture | Sweden           |
| HS-Code                | 39162000         |
| Lenght                 | 3000 mm          |
| Norm                   | ISO 10642        |
| Weight                 | 1.8 kg           |

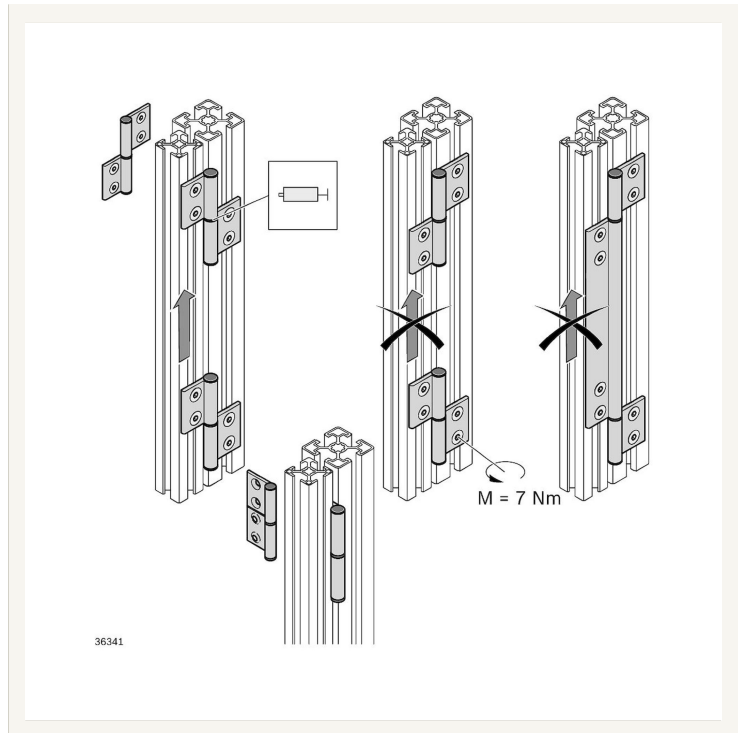

## STANDARDS & COMPLIANCE

ESD safe ISO 10642

## DESCRIPTION

The Bosch Rexroth 3842543372 hinge profile is used to build hinges on aluminum profiles in sizes 40, 45 and 50. It suits doors with profile frames or doors made of solid surface elements and can open to the right or left.

- Assembly as a removable or non-removable hinge
- Opening to the right and left, fitted on the outside or inside
- Centering slots act as a drill guide for the mounting bores
- ESD-capable, anodized aluminum surface
- Required finishing: cut the hinge halves to length and drill the fixing holes

## TECHNICAL DATA

| Property     | Value              |
|--------------|--------------------|
| Material     | Aluminum, anodized |
| Profile slot | 10                 |
| Length (L)   | 3000 mm            |

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

| Property              | Value                                                    |
|-----------------------|----------------------------------------------------------|
| Force (Fmax)          | 300 N                                                    |
| ESD                   | yes                                                      |
| Weight                | 1.8 kg                                                   |
| Condition on delivery | Single rod in standard length                            |
| Packaging unit        | 10                                                       |
| Required accessories  | Hinge pins, M6 T-nut, Screw ISO 10642 M6x12 (10 mm slot) |

Note: Due to contact points produced in the manufacturing process, the profile is supplied in a rod length of 3100 mm.