

Cam Wheel 65+ AL, 45° Deflection, VarioFlow Plus, Assembled - Bosch Rexroth 3842547049

Item no. BRR-3842547049

Manufacturer Bosch Rexroth

The 65+ AL cam wheel deflects the conveyor chain by 45° in the VarioFlow plus aluminum system, forming the deflection unit of a horizontal curve. It has a diecast aluminum housing with a PA chain wheel and non-rusting ball bearings. Supplied fully assembled, including fastening material for mounting to the AL section profile.


TECHNICAL DATA

Ausführungsklasse **TEC**

Country of Manufacture **Germany**

HS-Code **84313900**

Weight **3.3 kg**

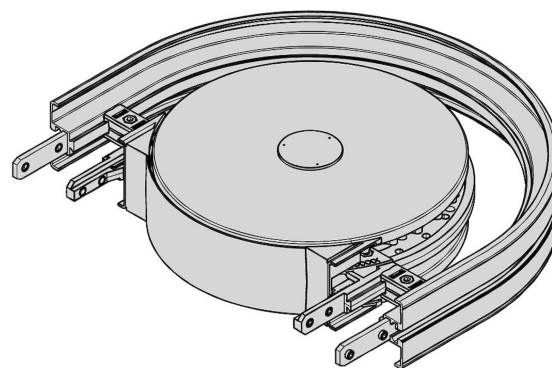

23983

DESCRIPTION

The 65+ AL cam wheel is the 45° deflection unit for horizontal curves in the VarioFlow plus chain conveyor system (aluminum system). It is intended for planners, system builders and maintenance teams who need a ready-to-mount deflection for the size 65 conveyor chain.

- Deflects the conveyor chain by 45° and guides it safely through the curve
- Diecast aluminum housing, chain wheel made of PA (white)
- Ball bearing made of non-rusting steel 1.4301/FDA
- Supplied fully assembled, incl. fastening material for mounting to the AL section profile

TECHNICAL DATA

Attribute	Value
Deflection angle (α)	45°
Size (b)	65 mm
Dimension (A)	185.5 mm
Effective sliding rail length	2x 0.38 m
Actual chain length	2x 0.32 m
Housing	diecast aluminum
Chain wheel	PA, white

Attribute	Value
Ball bearing	non-rusting steel 1.4301/FDA
Delivery state	fully assembled
Scope of delivery	incl. fastening material for mounting to the AL section profile
Weight	3.3 kg