

Stop Gate VE 2/X, 95 x 50 x 98 mm, for TS 2plus Transfer System - Bosch Rexroth 3842547770


Item no. BRR-3842547770

Manufacturer Bosch Rexroth

Pneumatic stop gate VE 2/X for controlled stopping and separating of workpiece pallets on the TS 2plus transfer system. Housing in hard-anodized aluminum with a hardened stop cam for long service life. Supplied with fastening material to mount on the ST 2/... conveyor section.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
HS-Code	84313900
Weight	1.57 kg

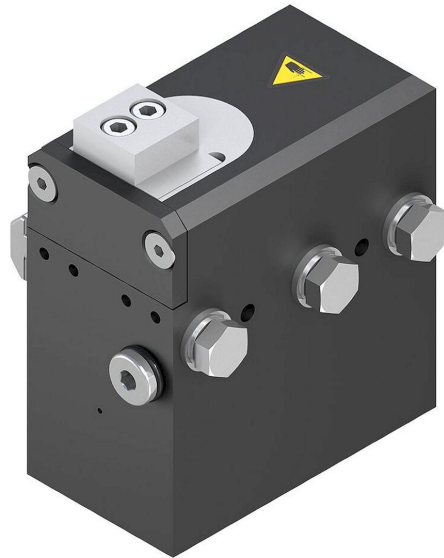

DESCRIPTION

The VE 2/X stop gate provides controlled stopping and separation of workpiece pallets on the Bosch Rexroth TS 2plus transfer system. It is pneumatically actuated and designed for automated assembly and conveying lines.

- Robust housing in hard-anodized aluminum with a hardened stop cam
- High permissible workpiece pallet weight, depending on nominal speed
- Includes fastening material to mount on the ST 2/... conveyor section
- Supplied fully assembled

TECHNICAL DATA

Dimensions	95 x 50 x 98 mm
Housing	Aluminum, hard anodized
Stop cam	Steel, hardened
Required compressed air connection	4 bar (min) to 6 bar (max)
Pneumatic straight connection Ø	6 mm
Nominal speed	6, 9, 12, 15, 18 m/min
Workpiece pallet total weight	max. 450 kg; by nominal speed 450 / 300 / 220 / 140 / 100 kg

Operating temperature	0 ... +60 °C
Scope of delivery	incl. all fastening material to mount on ST 2/... conveyor section
Delivery condition	fully assembled
Recommended accessories	VE 2/RS return stop, SH 2/... switch bracket
Notice	high-temperature stop gate on request
Weight	1.57 kg