

Belt Guide Profile GP 1, Variable Length 50-2000 mm, Anti-Static PE-UHMW - Bosch Rexroth 3842992943


Item no. BRR-3842992943

Manufacturer Bosch Rexroth

Guide profile for the TS 1 transfer system, cut to any length between 50 mm and 2000 mm. Made from anti-static PE-UHMW, the profile meets ESD requirements and protects the conveyor belt against electrostatic discharge. Designed for longitudinal transport as part of the line unit assembly.

TECHNICAL DATA

Ausführungsklasse	TEC
Country of Manufacture	Germany
HS-Code	39169010
Weight	0.1 kg

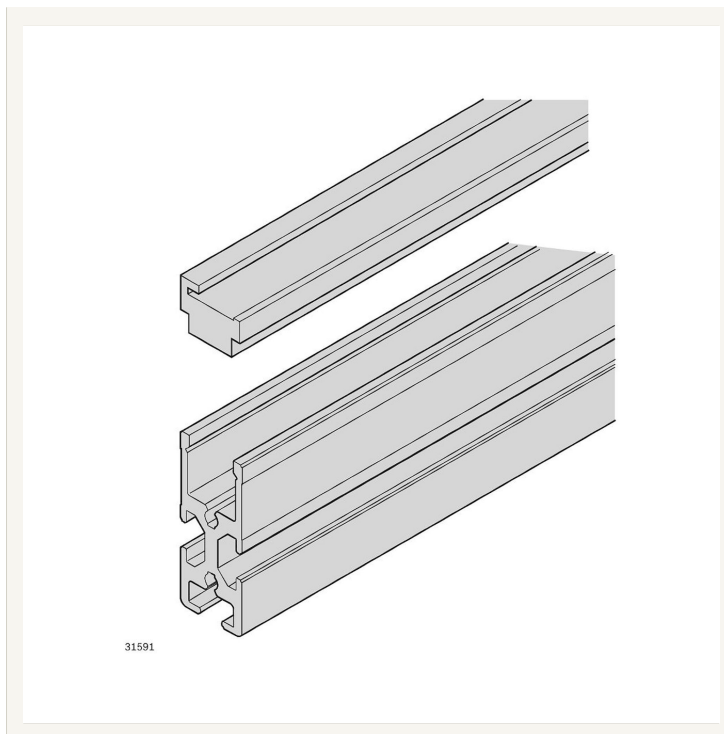

STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The Belt Guide Profile GP 1 guides and protects the conveyor belt in the Bosch Rexroth TS 1 transfer system. Supplied as a cut-to-length part, it can be trimmed to any dimension between 50 mm and 2000 mm for precise integration into longitudinal transport line units.

- **Variable length:** Cut to size from 50 mm to 2000 mm - exact fit for any line configuration without waste.
- **ESD-safe:** Anti-static PE-UHMW material prevents electrostatic build-up, protecting sensitive assemblies on the production line.
- **Low wear:** Ultra-High Molecular Weight Polyethylene delivers outstanding abrasion resistance and a low friction coefficient for extended belt service life.

TECHNICAL DATA

Attribute	Value
Designation	Belt Guide Profile GP 1
System	Transfer system TS 1
Condition on delivery	Variable length (cut-to-length pricing)

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Attribute	Value
Length min (L min)	50 mm
Length max (L max)	2000 mm
Material	PE-UHMW, anti-static
ESD	Yes