

Lean Conveyor Track Variable, Single-Color Rollers, Alu Profile, 355-6000 mm - Bosch Rexroth 3842998383

Item no. BRR-3842998383

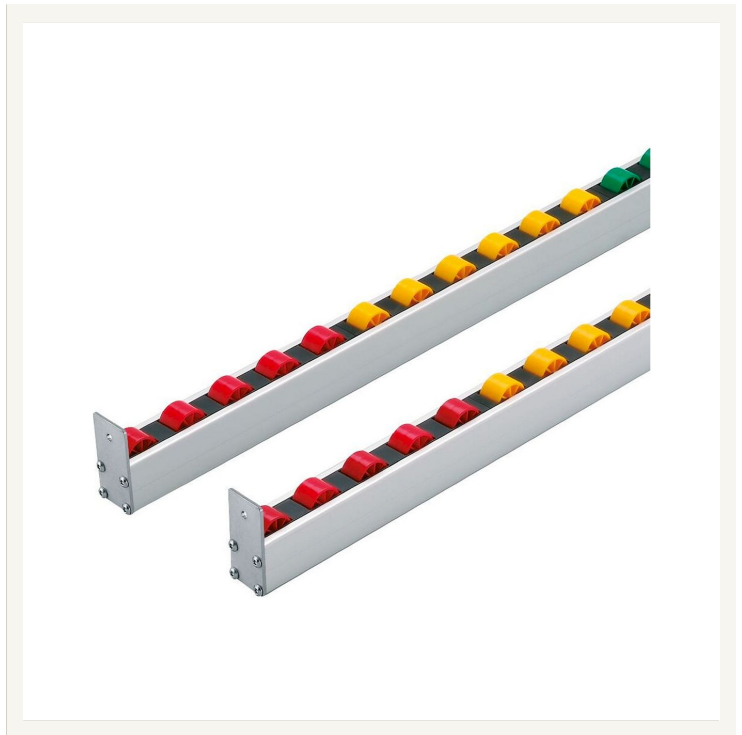
Manufacturer Bosch Rexroth

Flexible Lean conveyor track in aluminum U-profile for manually linking workstations in assembly and logistics. Supplied fully assembled with 32 mm rollers (with or without roller flange) in four colors for kanban or good/reject-part visualization. Configurable with or without stop and lateral guide; ESD-conductive version available.

TECHNICAL DATA

Country of Manufacture **Germany**

HS-Code **84283990**

Weight **0.01 kg**


STANDARDS & COMPLIANCE

ESD safe

DESCRIPTION

The variable Lean conveyor track (single-color) from Bosch Rexroth provides a flexible, immediately usable solution for linking workstations in manual assembly and lean production environments. The aluminum U-profile is available in lengths from 355 mm to 6000 mm and is delivered fully assembled as two conveyor sections (right/left). Four roller colors allow instant visual differentiation for kanban control or good/reject-part separation.

- **Flexible length range:** 355 mm to 6000 mm - suitable for compact workstations and longer transfer lines alike.
- **Four roller colors:** Black, red, yellow, and green enable color-coded kanban control or good/reject-part separation without additional labeling.
- **Choice of conveyor media:** 32 mm rollers with or without roller flange (RE45, RE45SK) and slide rails with or without integrated lateral guide (GS, GSSK) - matched to the specific transport requirement.
- **Configurable stop and lateral guide:** Rail holder available with or without stop plate, independently combined with or without lateral guide.
- **ESD-conductive version available:** Plain aluminum profile for handling electrostatic-sensitive

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

components (ESD: yes/no selectable).

- **Fully assembled on delivery:** Two conveyor sections (right/left) with stop plates - ready to install, minimal assembly effort on site.

TECHNICAL DATA

Parameter	Value
Min. length [L]	355 mm
Max. length [L]	6000 mm
Material	Aluminum profile (U-profile)
Conveyor medium	Rollers 32 mm dia. with/without roller flange, various spacing
Roller types	RE45, RE45SK
Slide rails	GS, GSSK (with/without integrated lateral guide)
Roller color	Black, red, yellow, green
Rail holder version	With stop / without stop
Lateral guide	With / without
Conductivity (ESD)	Yes / no (selectable)
Scope of delivery	Two conveyor sections right/left with stop plates, fully assembled
Packaging unit	1