

Hi-Speed/Hi-Accuracy Wrist Strap Test Station - Desco 222563


Item no. DESCO 222563

Manufacturer Desco

Wall-mounted test station with the Hi-Speed/Hi-Accuracy wrist strap tester. One second test, LED and buzzer indication, test range 750 k Ω to 35 M Ω at 24 VDC.

TECHNICAL DATA

Ausführungs-kategorie	ESD (antistatic)
Certification	IEC 61340-5-1
HS-Code	90303370
Weight	0.82 kg

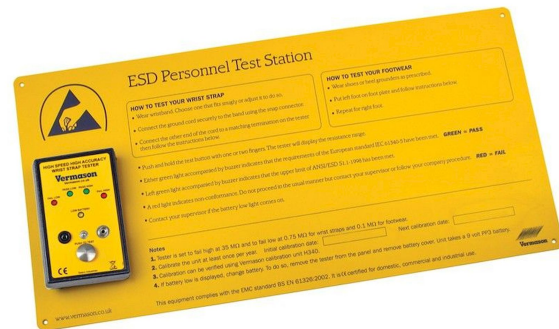

DESCRIPTION

The 222563 station fixes the Hi-Speed/Hi-Accuracy tester in place at the EPA entrance. Operators check their wrist strap at the push of a button and the result is held on the first press.

BENEFITS

- Simple stop-and-go tester, result fixed on the first push of the button
- One second test cycle
- LEDs display pass and fail conditions
- Buzzer sounds on pass

TECHNICAL DATA

- Test voltage: 24 VDC
- Test range: 750 k Ω low limit, 35 M Ω high limit
- Test cycle: 1 second
- Weight: 0.82 kg

APPLICATION

Stationary entry control of personnel grounding at the EPA entrance. Calibrate using the 222547 calibration unit.