

Guide Unit FENG-32-400-KF - Festo 150290

Item no. FES-150290


Manufacturer Festo

EAN 4052568004286

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Design	Guide
HS-Code	84821090
Hub [mm]	400
Material	Aluminium
Mounting position	arbitrary
Series	FENG
Temperature (max.)	80
Weight	2 kg

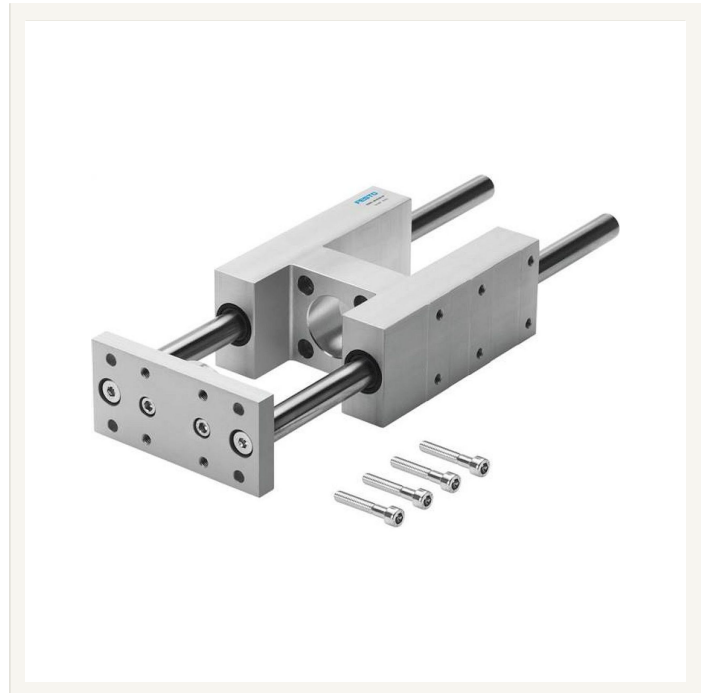

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

size	32
Stroke [mm]	400
installation position	arbitrary
Guide	ball guide
Construction set up	Guide
ambient temperature [°C]	-20 to 80
Max. force Fy [N]	750
Max. force Fy static [N]	1.020
Max. force Fz [N]	750
Max. force Fz static [N]	1.020
Max. torque Mx [Nm]	28
Max. torque Mx static [Nm]	38
Max. torque My [Nm]	34
Max. torque My static [Nm]	46

Max. torque Mz [Nm]	34
Max. torque Mz static [Nm]	46
Pushing force [N]	15
Product weight [g]	2.250
Fastening type	with female thread
Material information	Copper and PTFE-free RoHs compliant
Guide element material	Quenched and tempered steel
Housing material	Aluminium wrought alloy, anodised
Joch plate material	Aluminium wrought alloy, anodised