

Mini Guided Drive DFC-10-5-P-A-GF - Festo 189467

Item no. FES-189467


Manufacturer Festo

EAN 4052568150129

Festo pneumatic cylinder for precise linear motion and defined force in automation.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Bohrung (mm)	10.000000
HS-Code	84123100
Hub [mm]	5.000000
Pneumatischer Anschluss	M5
Weight	0.1 kg
Werkstoff	Aluminium

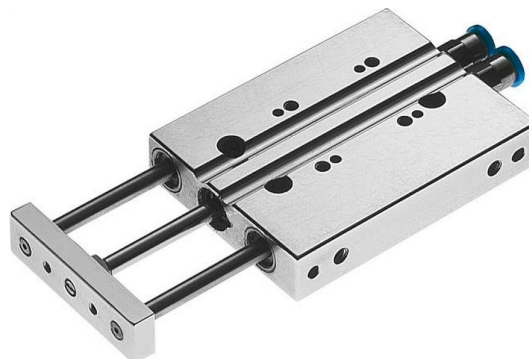

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic cylinder for precise linear motion and defined force in automation. The key technical data of this genuine Festo article are listed below.

Centre of mass distance of payload to Joch plate [mm]	15
Stroke [mm]	5
Piston diameter	10 mm
Operating mode actuator unit	Joch
Dampening	P: Elastic silencer rings / plates double-sided
installation position	arbitrary
Guide	sliding guide
Construction set up	Guide
Position detection	For proximity switch
Operating pressure [bar]	1 to 10
Max. speed [m/s]	1

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Principle of operation	double acting
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	2 - moderate corrosion stress
ambient temperature [°C]	-5 to 60
Impact energy at the end positions [J]	0,050
Max. torque Mx [Nm]	0,40
Max. usable load depending on the stroke at a defined distance xs [N]	12,2
Theoretical force at 6 bar, Return flow [N]	35,0
Theoretical force at 6 bar, flow [N]	47,0
Moving mass [g]	8,8
Moving mass at 0 mm stroke [g]	8,8
Product weight [g]	91,0
Supplement moved mass per 10 mm stroke [g]	2,8
Pneumatic connection	M5
Cover material	Aluminium wrought alloy
Seals material	NBR
Housing material	Aluminium wrought alloy
Piston rod material	High-alloyed stainless steels