

Plug Socket With Cabl KMEB-1-230AC-2.5 - Festo 151690

Item no. FES-151690


Manufacturer Festo

EAN 4052568030759

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Certification	IEC 60529
Corrosion resistance class CRC	1 - low corrosion stress
HS-Code	85444290
Material	PA66-GF30
Mounting position	arbitrary
Norm	EN 175301-803
Protection rating	IP65
Series	KMEB
Temperature (max.)	80
Weight	0.125 kg

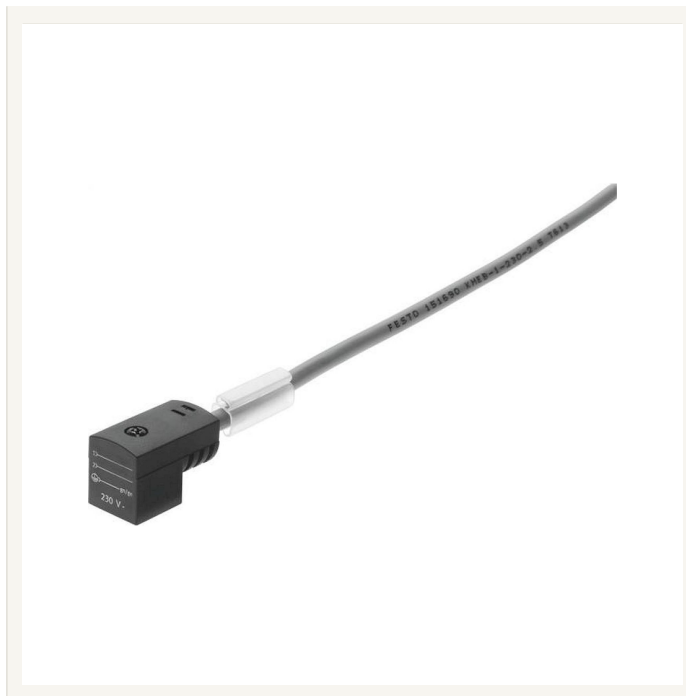

STANDARDS & COMPLIANCE

EN 175301-803 DIN EN 175301-803 IEC 60529

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Fastening type	on solenoid valve with central screw M2,5
installation position	arbitrary
Product weight [g]	125
Electrical connection	3-pin Angled socket Wiring diagram Form C acc. to EN 175301-803 acc. to DIN EN 175301-803
Protection line connection	Available
Cable length [MTR]	2,5
Cable diameter [mm]	5,2
Cable set up	3x0,5
Protection category	IP65 acc. to IEC 60529
ambient temperature [°C]	-20 to 80
CE certificate (see declaration of conformity)	to EU low voltage directive

Corrosion resistant class KBK	1 - low corrosion stress
Cable sleeve material	PVC
Housing material	PA66-GF30
Plug contacts material	Bronze
Nominal operating voltage AC [V]	230