

Plug Socket With Cable KMV-1-230AC-5 - Festo 30942

Item no. FES-30942

Manufacturer Festo

EAN 4052568022877

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Corrosion resistance class **1 - low corrosion stress**
CRC

HS-Code **85444290**

Mounting position **arbitrary**


Schutzart **IP67**

Serie **KMV**

Temperature (max.) **80**

Weight **0.32 kg**

Werkstoff **PC**

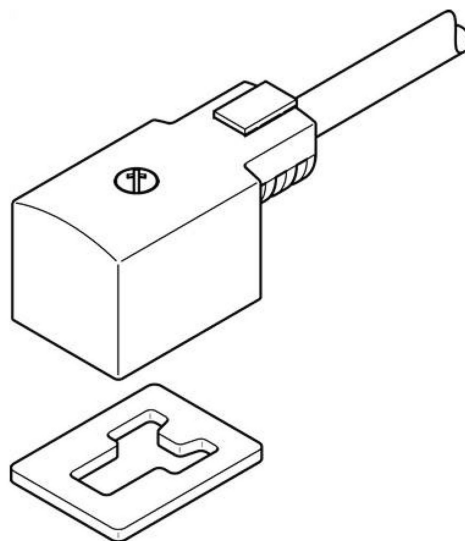

STANDARDS & COMPLIANCE

EN 175301-803 IEC 60529

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Fastening type	on solenoid valve with central screw M3
installation position	arbitrary
Product weight [g]	320
Electrical connection	Socket Wiring diagram Form B acc. to EN 175301-803
Reverse polarity protection	for all electrical connections
Protection line connection	Available
Cable length [MTR]	5,0
Cable diameter [mm]	6
Cable set up	3x0,75
Protection category	IP67 acc. to IEC 60529
ambient temperature [°C]	-20 to 80

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

CE certificate (see declaration of conformity)	to EU low voltage directive
Corrosion resistant class KBK	1 - low corrosion stress
Cable sleeve material	PVC
Housing material	PC
Plug contacts material	Bronze
Nominal operating voltage AC [V]	230