

Input Module CPX-4DE - Festo 195752

Item no. FES-195752

Manufacturer Festo

EAN 4052568007997

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Corrosion resistance class
CRC **1 - low corrosion stress**

HS-Code **85389099**


Material **Polyamide (PA)**

Operating voltage **24 V DC**

Series **CPX**

Temperature (max.) **50**

Weight **0.105 kg**

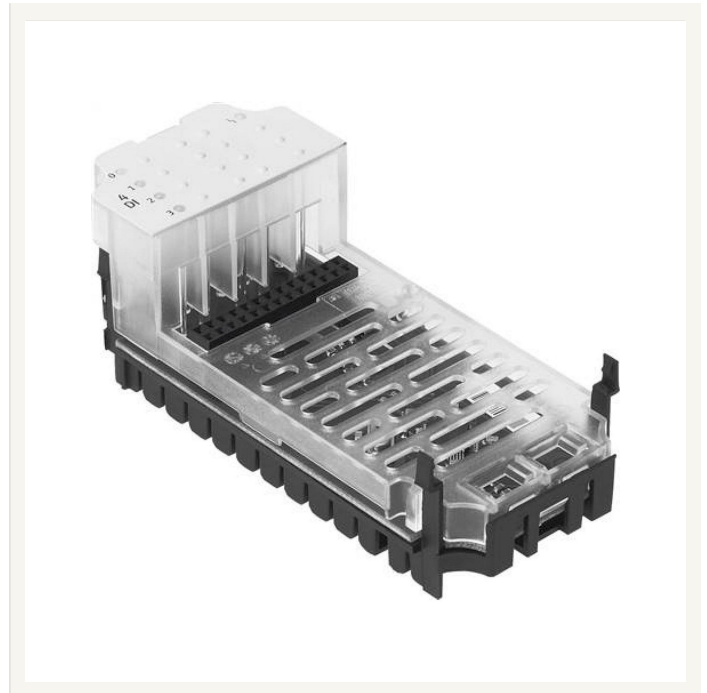

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

Dimensions W x L x H	50 mm x 107 mm x 50 mm (Incl. linking block and connectors)
Diagnosis	Kurzschluss/Überlast pro Kanal
Parameterising	Eingangsentprellzeit Signalverlängerungszeit Überwachung Modul Verhalten nach Kurzschluss
LED displays	1 Sammeldiagnose 4 Kanalstatus
Operating voltage range DC [V]	18 to 30
Intrinsic power input at operating voltage	Type 15 mA
Nominal operating voltage DC [V]	24
Potential separation channel - internal bus	no
Potential separation channel - channel	no
Corrosion resistant class KBK	(In integrated condition) 1 - low corrosion stress

Bearing temperature [°C]	-20 to 70
Protection category	Depends on connection block
ambient temperature [°C]	-5 to 50
Product weight [g]	39,0
Housing material	PC PA reinforced
Quantity inputs	4
Input debouncing time	3 ms (0.1 ms, 10 ms, 20 ms parameterisable)
Fuse (short circuit)	Internal electronic fuse Per module
Max. cumulative current inputs per module [A]	0,7
Switch level	Signal 0: <= 5 V Signal 1: >= 11 V
Characteristic curves inputs	IEC1131-T2
Switching logic inputs	PNP (Positive switching)