

Roller Lever Valve R-3-M5 - Festo 3629

Item no. FES-3629


Manufacturer Festo

EAN 4052568000462

Festo valve for fast, reliable control of compressed-air direction and flow.

TECHNICAL DATA

Actuation type	Mechanical
Betriebsdruck max [bar]	8.000000
Design	Plate seat
Dichtmaterial	NBR
Durchfluss [l/min]	80
Funktion	3/2 closed monostable
HS-Code	84812090
Material	Die-cast zinc
Medium	Compressed air
Nennweite DN [mm]	2
Operating conditions	ISO 8573-1
Pneumatic connection	M5
Temperature (max.)	60
Weight	0.04 kg

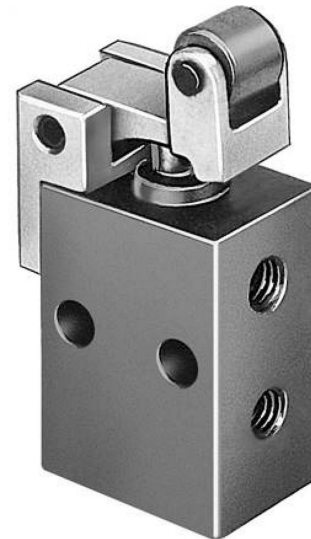

STANDARDS & COMPLIANCE

ISO8573-1:2010

DESCRIPTION

Festo valve for fast, reliable control of compressed-air direction and flow. The key technical data of this genuine Festo article are listed below.

Valve function	3/2 closed monostable
Actuation type	Mechanical
Normal nominal flow [l/min]	80
Operating pressure [bar]	-0.95 to 8
Construction set up	Plate seat
Nominal width [mm]	2,0
Control type	Direct
Operating medium	Compressed air to ISO8573-1:2010 [-:-:-]
ambient temperature [°C]	-10 to 60
actuating force [N]	16,5

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Product weight [g]	40
Fastening type	With throughway bores
Pneumatic connection 1	M5
Seals material	NBR
Housing material	Zinc pressure cast
Information about operating and control medium	Oiled operation possible (required in further operations)
Pneumatic connection 2	M5