

Service Unit FRC-3/4-D-MAXI-KC-A - Festo 185826

Item no. FES-185826


Manufacturer Festo

EAN 4052568145842

Festo air-preparation unit for clean, regulated compressed air that protects downstream components.

TECHNICAL DATA

Betriebsdruck max [bar]	12.000000
HS-Code	84811005
Pneumatischer Anschluss	G3/4
Weight	4.8 kg
Werkstoff	Zink-Druckguss

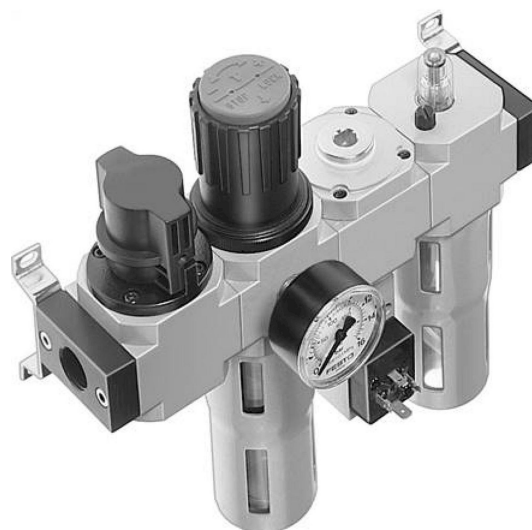

STANDARDS & COMPLIANCE

ISO8573-1:2010 ISO 8573-1:2010

DESCRIPTION

Festo air-preparation unit for clean, regulated compressed air that protects downstream components. The key technical data of this genuine Festo article are listed below.

size	Maxi
Model series	D
Actuation fuse	Rotary button with stopper
installation position	vertical $\pm 5^\circ$
Filter porosity [μm]	40
Condensate drain	Fully automatic
Construction set up	Branching module pressure switch Switch on valve Filter regulator with pressure gauge Proportional standard oil mist lubricator
Max. condensate amount [ml]	80
Clamp protection	Metal protection basket
pressure display	with pressure gauge

Operating pressure [bar]	1.5 to 12
Pressure regulation range [bar]	0.5 to 12
Max. pressure hysteresis [bar]	0,15
Normal nominal flow [l/min]	7.800
Maritime classification	see Certificate
Operating medium	Compressed air to ISO8573-1:2010 [-:-:-] Inert gases
Corrosion resistant class KBK	2 - moderate corrosion stress
Air purity class at the output	Compressed air to ISO 8573-1:2010 [7:4:-:-] Inert gases
Medium temperature [°C]	-10 to 60
ambient temperature [°C]	-10 to 60
Product weight [g]	4.600
Fastening type	pipe installation With Accessories Selectively:
Pneumatic connection 1	G3/4
Pneumatic connection 2	G3/4
Housing material	Zinc pressure cast
Clamps material	PC
Material information	LABS containing materials included