

Branching Module FRM-H-1/2-D-MIDI - Festo 162792

Item no. FES-162792


Manufacturer Festo

EAN 4052568072544

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Betriebsdruck max [bar]	16.000000
HS-Code	84813099
Pneumatischer Anschluss	G1/2
Weight	0.55 kg
Werkstoff	Aluminium

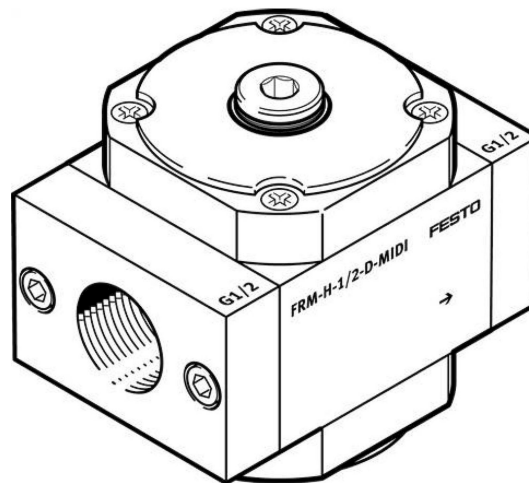

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

installation position	arbitrary
Construction set up	Branching module
Operating pressure [bar]	0.2 to 16
Normal nominal flow in main flow direction 1 -> 2 [l/min]	5.100
Maritime classification	see Certificate
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-] >Inert gases
Corrosion resistant class KBK	2 - moderate corrosion stress
Bearing temperature [°C]	-10 to 60
Air purity class at the output	Compressed air to ISO 8573-1:2010 [7:-:-] >Inert gases
Medium temperature [°C]	-10 to 60

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

ambient temperature [°C]	-10 to 60
Product weight [g]	506
Pneumatic connection 1	G1/2
Pneumatic connection 2	G1/2
Pneumatic connection 3	G1/2
Pneumatic connection 4	G1/4
Material information	Copper and PTFE-free RoHs compliant
Housing material	Aluminium die casting