

Pressure Regulator MS4-LRB-1/4-D6-VS-AS-Z - Festo 529482

Item no. FES-529482


Manufacturer Festo

EAN 4052568085285

Festo valve for fast, reliable control of compressed-air direction and flow.

TECHNICAL DATA

Betriebsdruck max [bar]	14.000000
HS-Code	84811099
Pneumatischer Anschluss	G1/4
Weight	0.28 kg
Werkstoff	Aluminium

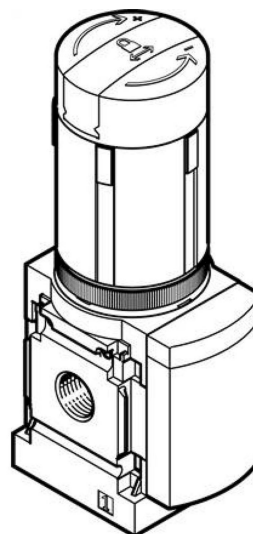

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo valve for fast, reliable control of compressed-air direction and flow. The key technical data of this genuine Festo article are listed below.

size	4
Model series	MS
Actuation fuse	Rotary button with stopper With Accessories lockable
installation position	arbitrary
Construction set up	Directly controlled membrane control valve With Continuous pressure supply
Controller function	Output pressure constant With Return current behaviour With relieving With Pre-pressure compensation
Operating pressure [bar]	0.8 to 14
Pressure regulation range [bar]	0.3 to 7
Max. pressure hysteresis [bar]	0,25
Normal nominal flow [l/min]	1.700

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4] Inert gases
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	2 - moderate corrosion stress
Bearing temperature [°C]	-10 to 60
Food compatibility	See expanded material information
Medium temperature [°C]	-10 to 60
ambient temperature [°C]	-10 to 60
Product weight [g]	222
Fastening type	Front panel integration pipe installation With Accessories Selectively:
Pneumatic connection 1	G1/4
Pneumatic connection 2	G1/4
Material information	Copper and PTFE-free RoHs compliant
Connection plate material	Aluminium die casting
Control panel material	PA POM
Seals material	NBR
Housing material	Aluminium die casting
Diaphragm material	NBR