

Mini Slide DGSL-4-30-PA - Festo 543912

Item no. FES-543912


Manufacturer Festo

EAN 4052568182571

Festo pneumatic cylinder for precise linear motion and defined force in automation.

TECHNICAL DATA

Betriebsdruck max [bar]	8.000000
Bore (mm)	6.000000
Corrosion resistance class CRC	0 - No corrosion stressing
Cushioning	P: Elastic silencer rings / plates double-sided
Design	Yoke, piston, piston rod, carriage
Dichtmaterial	HNBR
Funktion	double-acting
HS-Code	84123100
Hub [mm]	30
Material	Aluminium
Medium	Compressed air
Mounting position	arbitrary
Operating conditions	ISO 8573-1
Pneumatic connection	M3
Position sensing	Yes
Series	DGSL
Temperature (max.)	60
Weight	0.15 kg

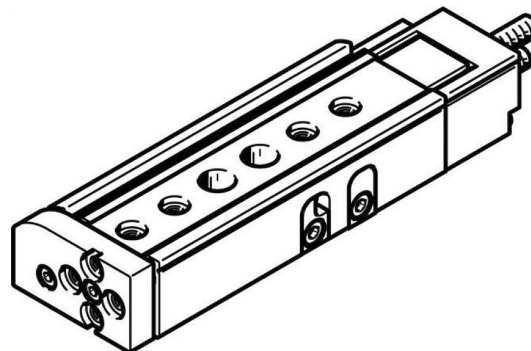

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic cylinder for precise linear motion and defined force in automation. The key technical data of this genuine Festo article are listed below.

Stroke [mm]	30
Alignable end position range / Length front [mm]	25,5
Alignable end position range / Length rear [mm]	13,5
Piston diameter	6 mm
Operating mode actuator unit	Joch

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Dampening	P: Elastic silencer rings / plates double-sided
installation position	arbitrary
Guide	Ball cage guide
Construction set up	Joch Kolben Kolbenstange Schlitten
Position detection	For proximity switch
Operating pressure [bar]	2.5 to 8
Max. speed [m/s]	0,5
Repeatability	0.3 mm
Principle of operation	double acting
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	0 - No corrosion stressing
ambient temperature [°C]	0 to 60
Impact energy at the end positions [J]	0,015
Dampening length [mm]	0,9
Max. force Fy [N]	387
Max. force Fz [N]	387
Max. torque Mx [Nm]	2
Max. torque My [Nm]	2,0
Max. torque Mz [Nm]	2,0
Theoretical force at 6 bar, Return flow [N]	13
Theoretical force at 6 bar, flow [N]	17
Moving mass [g]	38
Product weight [g]	108
Alternative connections	See product drawing
Fastening type	With throughway bores
Pneumatic connection	M3
Material information	Copper and PTFE-free RoHs compliant
Cover material	Aluminium wrought alloy
Seals material	HNBR
Housing material	Aluminium wrought alloy
Piston rod material	High-alloyed stainless steels