

Activated Carbon Filt MS9-LFX-G-U - Festo 564038

Item no. FES-564038


Manufacturer Festo

EAN 4052568211202

Festo air-preparation unit for clean, regulated compressed air that protects downstream components.

TECHNICAL DATA

Betriebsdruck max [bar]	20.000000
HS-Code	84213925
Weight	2.4 kg
Werkstoff	Aluminium

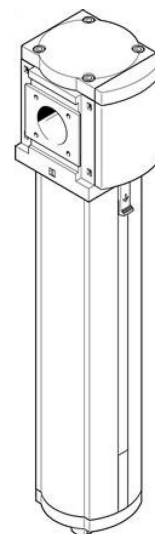

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo air-preparation unit for clean, regulated compressed air that protects downstream components. The key technical data of this genuine Festo article are listed below.

size	9
Model series	MS
installation position	vertical $\pm 5^\circ$
Construction set up	activated carbon filter
Operating pressure [bar]	0 to 20
Max. normal flow for air purity class [l/min]	6.500
Operating medium	Compressed air to ISO 8573-1:2010 [1:4:2]
Corrosion resistant class KBK	2 - moderate corrosion stress
Bearing temperature [°C]	-10 to 60
Air purity class at the output	Compressed air acc. to ISO 8573-1:2010 [1:4:1]
Medium temperature [°C]	5 to 30

Residual oil content [mg/m ³]	0,003
ambient temperature [°C]	-10 to 60
Product weight [g]	2.000
Fastening type	pipe installation With Accessories Selectively:
Pneumatic connection 1	Battery module
Pneumatic connection 2	Battery module
Cover material	PA
Seals material	NBR
Filter material	Activated carbon
Housing material	Aluminium die casting
Clamps material	Aluminium wrought alloy
Window material	PA