

Precision Pressure Re MS6-LRP-1/4-D5-A8 - Festo 538008

Item no. FES-538008


Manufacturer Festo

EAN 4052568015985

Festo air-preparation unit for clean, regulated compressed air that protects downstream components.

TECHNICAL DATA

Betriebsdruck max [bar]	14.000000
Corrosion resistance class CRC	2 - moderate corrosion stress
Design	Pre-control precision membrane control valve
Dichtmaterial	NBR
Durchfluss [l/min]	1400
HS-Code	84811099
Material	Aluminium
Medium	Compressed air, neutral gases
Mounting position	arbitrary
Operating conditions	ISO 8573-1
Pneumatic connection	G1/4
Regelbereich max. [bar]	4
Series	MS6
Temperature (max.)	60
Weight	1.1 kg

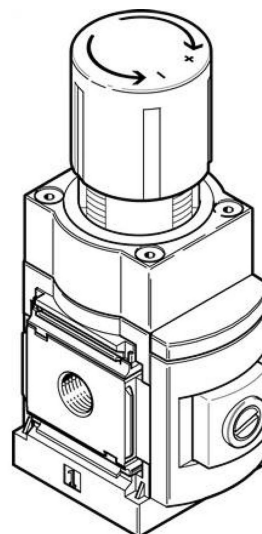

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo air-preparation unit for clean, regulated compressed air that protects downstream components. The key technical data of this genuine Festo article are listed below.

size	6
Model series	MS
Actuation fuse	Rotary button with stopper
installation position	arbitrary
Construction set up	Pre-control precision membrane control valve
Controller function	Output pressure constant With relieving
pressure display	G1/8 prepared
Operating pressure [bar]	1 to 14

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Pressure regulation range [bar]	0.1 to 4
Max. pressure hysteresis [bar]	0,02
Flow secondary venting [l/min]	>= 650 l/min
Normal nominal flow [l/min]	>= 1400 l/min
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4] Inert gases
Information about operating and control medium	Oiled operation not possible
Corrosion resistant class KBK	2 - moderate corrosion stress
Bearing temperature [°C]	-10 to 60
Medium temperature [°C]	-10 to 60
ambient temperature [°C]	-10 to 60
Product weight [g]	1.000
Fastening type	Front panel integration pipe installation With Accessories Selectively:
Pneumatic connection 1	G1/4
Pneumatic connection 2	G1/4
Pneumatic connection 3	G1/4
Material information	Copper and PTFE-free RoHs compliant
Seals material	NBR
Housing material	Aluminium