

Compact Cylinder ADNGF-50-10-P-A - Festo 554259

Item no. FES-554259


Manufacturer Festo

EAN 4052568198848

Festo pneumatic cylinder for precise linear motion and defined force in automation.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Bohrung (mm)	50.000000
Corrosion resistance class CRC	2 - moderate corrosion stress
Cushioning	P: Elastic silencer rings / plates double-sided
Design	Piston, piston rod, profile tube
Dichtmaterial	TPE-U(PU)
Funktion	doppeltwirkend
HS-Code	84123100
Hub [mm]	10
Medium	Druckluft
Mounting position	arbitrary
Norm	ISO 21287
Pneumatischer Anschluss	G1/8
Position sensing	Yes
Serie	ADNGF
Temperature (max.)	80
Weight	0.7 kg

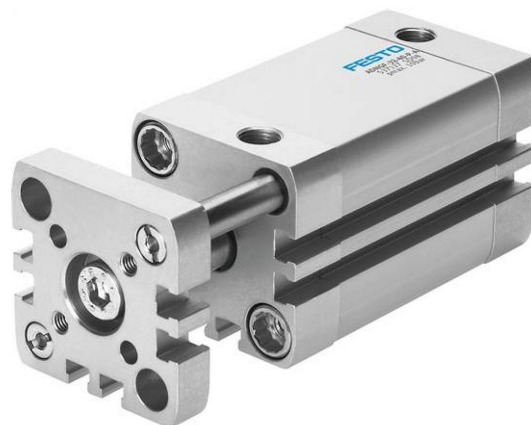

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic cylinder for precise linear motion and defined force in automation. The key technical data of this genuine Festo article are listed below.

Stroke [mm]	10
Piston diameter	50 mm
Based on standard	ISO 21287
Dampening	P: Elastic silencer rings / plates double-sided
installation position	arbitrary
Construction set up	Piston piston rod profile tube
Position detection	For proximity switch

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Anti-twist lock / guide	Guide rod with yoke
Operating pressure [bar]	1 to 10
Principle of operation	double acting
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	2 - moderate corrosion stress
ambient temperature [°C]	-20 to 80
Impact energy at the end positions [J]	1,00
Theoretical force at 6 bar, Return flow [N]	1.057
Theoretical force at 6 bar, flow [N]	1.178
Moving mass at 0 mm stroke [g]	287
Weight supplement per 10 mm stroke [g]	64
Base weight at 0 mm stroke [g]	687
Supplement moved mass per 10 mm stroke [g]	29
Pneumatic connection	G1/8
Material information	RoHs compliant
Cover material	aluminium anodized
Seals material	TPE-U(PUR)
Piston rod material	High-alloyed steel
Cylinder tube material	Aluminium wrought alloy Smooth anodised