

Manifold Rail MHJ10-P16 - Festo 557608

Item no. FES-557608

Manufacturer Festo

EAN 4052568203481

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA


Corrosion resistance class CRC **2 - moderate corrosion stress**

HS-Code **76169990**

Pneumatic connection **G1/2**

Series **MHJ10**

Weight **0.65 kg**

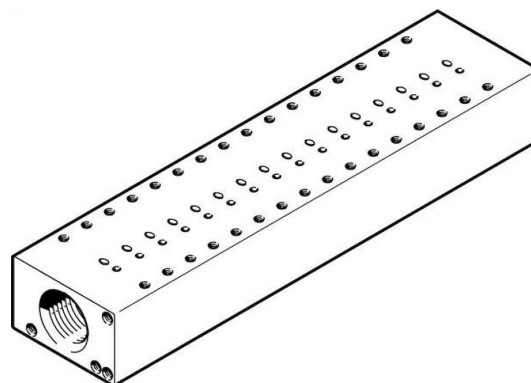

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Pitch dimension [mm]	11
Max. number of valve spaces	16 Design possible according to customer wishes
Corrosion resistant class KBK	2 - moderate corrosion stress
Product weight [g]	635
Fastening type	With mounting bracket
Pneumatic connection 1	G1/2
Pneumatic connection 2	M7
Material information	RoHs compliant
Connection strip material	Aluminium wrought alloy anodized
Reverse polarity protection	for operating voltage
KC-mark	KC-EMV