

Manifold Block CPE18-PRS-3/8-7 - Festo 543844

Item no. FES-543844


Manufacturer Festo

EAN 4052568091736

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
HS-Code	84819000
Pneumatischer Anschluss	G3/8
Weight	1.1 kg

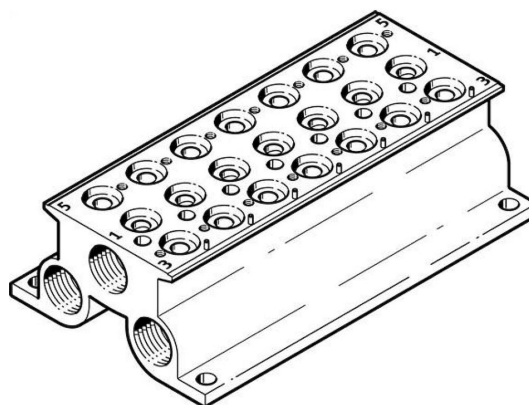

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Pitch dimension [mm]	26
installation position	arbitrary
Max. number of valve spaces	7
Max. number of pressure zones	2
Operating pressure [bar]	-0.9 to 10
Corrosion resistant class KBK	2 - moderate corrosion stress
Medium temperature [°C]	-5 to 50
ambient temperature [°C]	-5 to 50
Max. tightening torque Valve fastening [Nm]	2,00000
Product weight [g]	999,000
Fastening type connection block	With throughway bores
Fastening type valve	with female thread
Pneumatic connection 1	G3/8
Pneumatic connection 3	G3/8

Pneumatic connection 5	G3/8
Material information	RoHs compliant
Connection strip material	Aluminium wrought alloy