

Manifold Block CPE10-PRS-1/4-4 - Festo 543823

Item no. FES-543823


Manufacturer Festo

EAN 4052568091521

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Corrosion resistance class CRC	2 - moderate corrosion stress
HS-Code	84819000
Mounting position	arbitrary
Pneumatic connection	G1/4
Series	CPE10
Temperature (max.)	50
Weight	0.28 kg

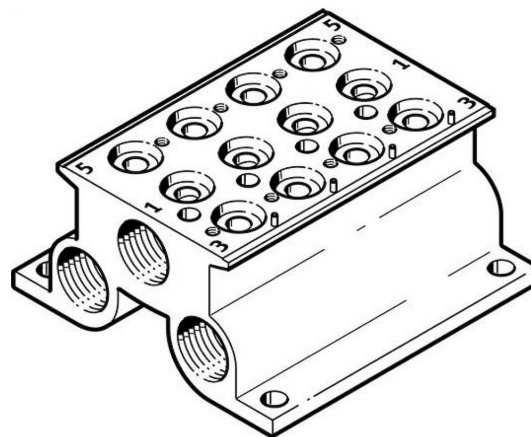

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Pitch dimension [mm]	16
installation position	arbitrary
Max. number of valve spaces	4
Max. number of pressure zones	2
Operating pressure [bar]	-0.9 to 10
Corrosion resistant class KBK	2 - moderate corrosion stress
Medium temperature [°C]	-5 to 50
ambient temperature [°C]	-5 to 50
Max. tightening torque Valve fastening [Nm]	1,20000
Product weight [g]	227,000
Fastening type connection block	With throughway bores
Fastening type valve	with female thread
Pneumatic connection 1	G1/4
Pneumatic connection 3	G1/4

Pneumatic connection 5	G1/4
Material information	RoHs compliant
Connection strip material	Aluminium wrought alloy