

Semi-Rotary Drive DSM-T-40-270-P-A-B - Festo 1145110

Item no. FES-1145110


Manufacturer Festo

EAN 4052568227562

Festo rotary actuator for defined swivel motion and positioning in automation.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
HS-Code	84123900
Pneumatischer Anschluss	G1/8
Weight	4.1 kg
Werkstoff	Aluminium

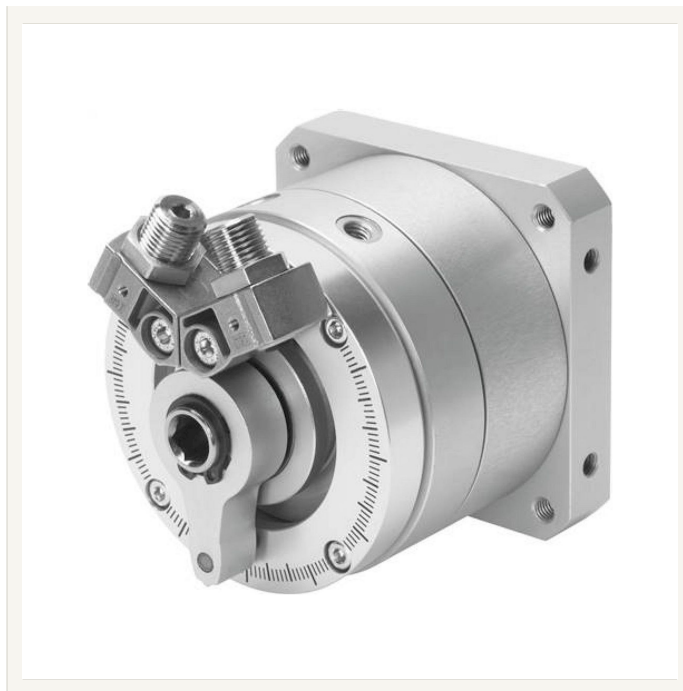

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo rotary actuator for defined swivel motion and positioning in automation. The key technical data of this genuine Festo article are listed below.

size	40
Dampening angle [deg]	2,0
Settings range swivel angle [deg]	0 to 270
Swivel angle [deg]	0 to 270
Dampening	P: Elastic silencer rings / plates double-sided
installation position	arbitrary
Fine adjustment [deg]	-6
Principle of operation	double acting
Construction set up	Rotary vane
Position detection	For proximity switch
Operating pressure [bar]	2 to 10
Max. swivel frequency at 6 bar [Hz]	2,0

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Corrosion resistant class KBK	0 - No corrosion stressing
ambient temperature [°C]	-10 to 60
Max. axial force [N]	120
Max. radial force [N]	350
Theoretical torque at 6 bar [Nm]	40,00
Permitted mass moment of inertia [kg/m²]	0,03500
Product weight [g]	3.870
Fastening type	with female thread
Pneumatic connection	G1/8
Material information	Copper and PTFE-free RoHs compliant
Drive shaft material	Nickel- plated steel
Seals material	TPE-U(PU)
Housing material	Aluminium wrought alloy