

Plug Socket With Cabl NEBV- HSG2-P-1-N-LE2 - Festo 566667

Item no. FES-566667


Manufacturer Festo

EAN 4052568057442

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

HS-Code	85444290
Material	POM
Mounting position	arbitrary
Protection rating	IP40
Series	NEBV
Temperature (max.)	60
Weight	0.021 kg

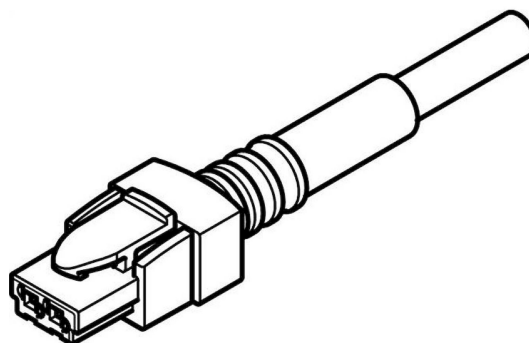

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Line designation	Without sign holder
Product weight [g]	16
Electrical connection 1, function	Field device screen
Electrical connection 1, design	Angular
Electrical connection 1, connection type	socket / container / ...
Electrical connection 1, cable output	straight
Electrical connection 1, connection technology	Wiring diagram S
Electrical connection 1, number of pins / wires	2
Electrical connection 1, occupied pin / wire	2
Electrical connection 1, fastening type	Ratcheting lock
Electrical connection 2, function	Control screen
Electrical connection 2, connection type	cable

Electrical connection 2, connection technology	Open end
Electrical connection 2, number of pins / wires	2
Electrical connection 2, occupied pin / wire	2
Operating voltage range DC [V]	0 to 60
Current carrying capacity at 40°C [A]	3
Cable length [MTR]	1,0
Line properties	For static applications
Cable diameter [mm]	3,4
Cable set up	2x0,14
Protection category	IP40
Information about protection category	In mounted condition
ambient temperature [°C]	-5 to 60
Material information	RoHs compliant
Cable sleeve material	TPE-U(PUR)
Cable shield colour	 Grey
Housing material	POM
Housing colour	 black
Insulation sleeve material	PVC
Conductor - nominal cross-section [mm²]	0,14
Plug contacts material	Copper allow Tin plated
Wire ends	Unshielded Cut dull
installation position	arbitrary