

Plug Connector NECU-FCG40-K - Festo 570895

Item no. FES-570895

Manufacturer Festo

EAN 4052568058654

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Corrosion resistance class CRC **0 - No corrosion stressing**

HS-Code **85366990**

Material **PBT**


Norm **EN 60603-13**

Protection rating **IP40**

Series **NECU**

Temperature (max.) **50**

Weight **0.0074 kg**

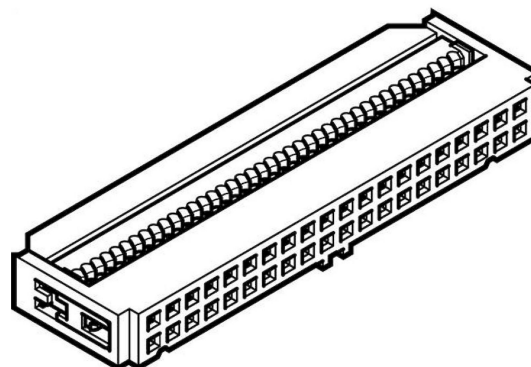

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Operating voltage range DC [V]	0 to 30
Current carrying capacity at 40°C [A]	1,5
Protection category	IP40
ambient temperature [°C]	-5 to 50
Material information	RoHs compliant
Corrosion resistant class KBK	0 - No corrosion stressing
Housing material	PBT reinforced
Plug contacts material	Bronze Gold plated
Complies to standard	EN 60603-13
Connection frequency	50
Cable output	straight
Product weight [g]	5,0
Electrical connection 1, design	Angular
Electrical connection 1, connection type	socket / container /

Electrical connection 1, connection technology	Wiring diagram FC
Electrical connection 1, number of pins / wires	40
Electrical connection 1, fastening type	Ratcheting lock
Electrical connection 2, connection technology	Crimp terminal
Conductor - nominal cross-section [mm²]	0,13
Conductor nominal cross-section (AWG)	AWG26