

Cartridge QSPLKG20-10 - Festo 132856

Item no. FES-132856


Manufacturer Festo

EAN 4052568028299

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Baugröße BG	Standard
Corrosion resistance class CRC	1 - low corrosion stress
Design	Push-pull principle
HS-Code	39174000
Material	Polyamide (PA)
Medium	Compressed air
Mounting position	arbitrary
Nennweite DN [mm]	6,1
Series	QSPLKG20
Temperature (max.)	60
Weight	0.014 kg

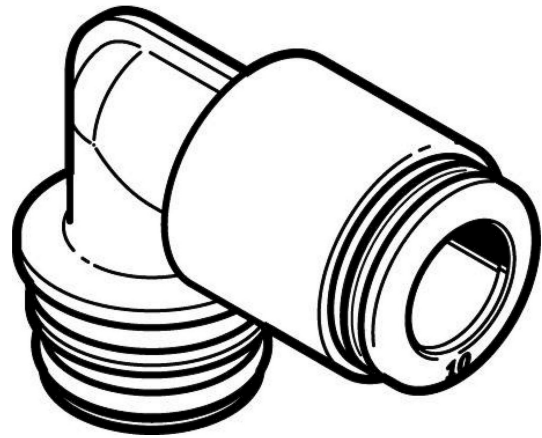

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

size	Standard
Nominal width [mm]	6,1
Seal type on stud	O-ring
installation position	arbitrary
Packing size	10
Construction set up	Push-pull principle
Operating pressure complete temperature range [bar]	-0.95 to 10
Maritime classification	see Certificate
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Information about operating and control medium	Oiled operation possible

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Corrosion resistant class KBK	1 - low corrosion stress
ambient temperature [°C]	-5 to 60
Product weight [g]	14,0
Pneumatic connection 1	Cartridge 20 mm
Pneumatic connection 2	For hose exterior diameter 10 mm
Sleeve colour	 blue
Material information	RoHs compliant
Housing material	PA reinforced
Sleeve material	POM
Tube seal, hose seal material	NBR
Hose clamping segment material	High-alloyed stainless steels