

Cartridge QSPLKG20-8 - Festo 132855

Item no. FES-132855


Manufacturer Festo

EAN 4052568028282

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Baugröße BG	Standard
Corrosion resistance class CRC	1 - low corrosion stress
Design	Push-pull principle
HS-Code	39174000
Material	Polyamide (PA)
Medium	Compressed air
Mounting position	arbitrary
Nennweite DN [mm]	4,8
Series	QSPLKG20
Temperature (max.)	60
Weight	0.01 kg

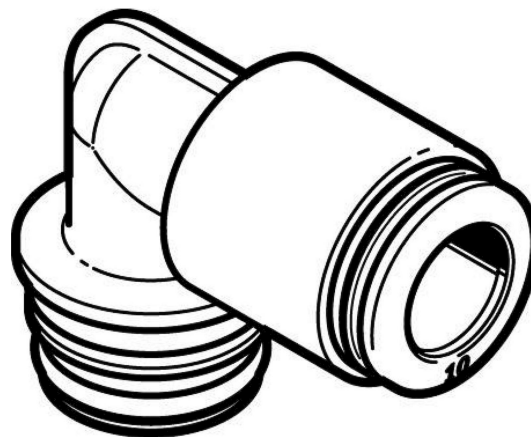

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

size	Standard
Nominal width [mm]	4,8
Seal type on stud	O-ring
installation position	arbitrary
Packing size	10
Construction set up	Push-pull principle
Operating pressure complete temperature range [bar]	-0.95 to 10
Maritime classification	see Certificate
Operating medium	Compressed air to ISO 8573-1:2010 [7:-:-]
Information about operating and control medium	Oiled operation possible

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Corrosion resistant class KBK	1 - low corrosion stress
ambient temperature [°C]	-5 to 60
Product weight [g]	10,0
Pneumatic connection 1	Cartridge 20 mm
Pneumatic connection 2	For hose exterior diameter 8 mm
Sleeve colour	 blue
Material information	RoHs compliant
Housing material	PA reinforced
Sleeve material	POM
Tube seal, hose seal material	NBR
Hose clamping segment material	High-alloyed stainless steels