

## Flow Control Plate VABF-S1-2-F1B1-C - Festo 555788

Item no. FES-555788


Manufacturer Festo

EAN 4052568200091

Genuine Festo accessory for exact mounting, fastening and extension of the associated component.

### TECHNICAL DATA

|                                |                            |
|--------------------------------|----------------------------|
| Betriebsdruck max [bar]        | 10.000000                  |
| Corrosion resistance class CRC | 0 - No corrosion stressing |
| HS-Code                        | 84819000                   |
| Material                       | Aluminium                  |
| Medium                         | Compressed air             |
| Mounting position              | arbitrary                  |
| Norm                           | ISO 5599-1                 |
| Protection rating              | IP65                       |
| Series                         | VABF                       |
| Temperature (max.)             | 50                         |
| Weight                         | 0.65 kg                    |

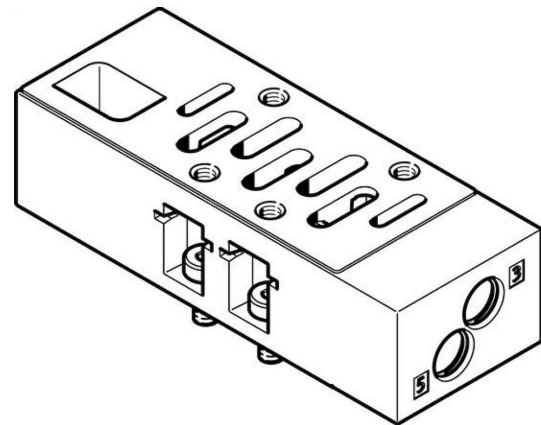

### STANDARDS & COMPLIANCE

ISO 8573-1:2010

### DESCRIPTION

Genuine Festo accessory for exact mounting, fastening and extension of the associated component. The key technical data of this genuine Festo article are listed below.

|                                                |                                                           |
|------------------------------------------------|-----------------------------------------------------------|
| Build.width [mm]                               | 54                                                        |
| Based on standard                              | ISO 5599-1                                                |
| installation position                          | arbitrary                                                 |
| Pneumatic height linking                       | Throttle plate exhaust air throttling                     |
| Input pressure 1 [bar]                         | 0.5 to 10                                                 |
| Operating medium                               | Compressed air to ISO 8573-1:2010 [7:4:4]                 |
| Information about operating and control medium | Oiled operation possible (required in further operations) |
| Corrosion resistant class KBK                  | 0 - No corrosion stressing                                |
| Protection category                            | IP65<br>NEMA 4                                            |
| ambient temperature [°C]                       | -5 to 50                                                  |
| Product weight [g]                             | 565                                                       |

#### esd.equipment

Keldersstr. 15  
42697 Solingen, Deutschland  
VAT ID: DE269659389

Phone: +49 212 38340680  
shop@esd-equipment.com

**esd.equipment**

Page 1/2

|                               |                                                |
|-------------------------------|------------------------------------------------|
| Fastening type height linking | on single connection plate<br>on linking plate |
| Material information          | RoHs compliant                                 |
| Operating pressure [bar]      | -0.9 to 10                                     |
| Housing material              | Aluminium die casting                          |