

Vertical Pressure Shu VABF-S1-2-L1D1-C - Festo 555790

Item no. FES-555790


Manufacturer Festo

EAN 4052568200114

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Corrosion resistance class CRC	0 - No corrosion stressing
Durchfluss [l/min]	1950
HS-Code	84819000
Medium	Druckluft
Mounting position	arbitrary
Norm	ISO 5599-1
Schutzart	IP65
Serie	VABF
Temperature (max.)	50
Weight	1.1 kg
Werkstoff	Aluminium

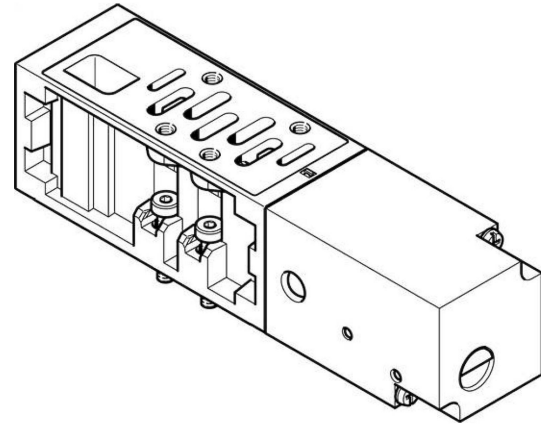

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

Build.width [mm]	54
Based on standard	ISO 5599-1
installation position	arbitrary
Pneumatic height linking	Alternative pressure supply for 1
Input pressure 1 [bar]	0.5 to 10
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	0 - No corrosion stressing
Protection category	IP65 NEMA 4
ambient temperature [°C]	-5 to 50

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

Product weight [g]	1.030
Fastening type height linking	on single connection plate on linking plate
Material information	RoHs compliant
Operating pressure [bar]	-0.9 to 10
Normal nominal flow [l/min]	1.950
Housing material	Aluminium die casting