

## Manifold Rail VABM-L1-10AS-M5-2 - Festo 566522

Item no. FES-566522


Manufacturer Festo

EAN 4052568100230

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

### TECHNICAL DATA

|                                |                               |
|--------------------------------|-------------------------------|
| Betriebsdruck max [bar]        | 10.000000                     |
| Corrosion resistance class CRC | 2 - moderate corrosion stress |
| HS-Code                        | 84819000                      |
| Pneumatischer Anschluss        | M5                            |
| Serie                          | VABM                          |
| Weight                         | 0.038 kg                      |

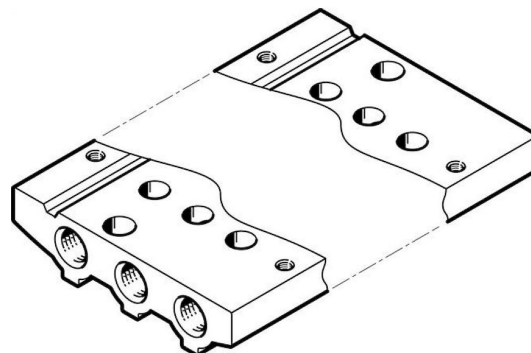

### DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

|                                                |                                                        |
|------------------------------------------------|--------------------------------------------------------|
| Pitch dimension [mm]                           | 10,5                                                   |
| Max. number of valve spaces                    | 16                                                     |
| Operating pressure [bar]                       | -0.9 to 10                                             |
| Permission                                     | RCM mark<br>c CSA us (OL)<br>c UL us - Recognized (OL) |
| Corrosion resistant class KBK                  | 2 - moderate corrosion stress                          |
| Max. tightening torque Slot rail assembly [Nm] | 1,5                                                    |
| Max. tightening torque Valve fastening [Nm]    | 0,45                                                   |
| Max. tightening torque wall assembly [Nm]      | 3,0                                                    |
| Product weight [g]                             | 26                                                     |
| Pneumatic connection 1                         | M5                                                     |
| Pneumatic connection 3                         | M5                                                     |
| Pneumatic connection 5                         | M5                                                     |
| Material information                           | RoHs compliant                                         |
| Connection strip material                      | Aluminium wrought alloy                                |