

Manifold Rail VABM-L1-10AW-M7-8 - Festo 566552

Item no. FES-566552


Manufacturer Festo

EAN 4052568214241

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Corrosion resistance class CRC	2 - moderate corrosion stress
HS-Code	84819000
Pneumatischer Anschluss	M7
Serie	VABM
Weight	0.2 kg

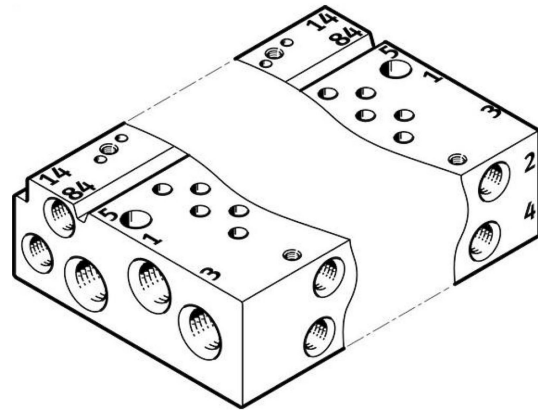

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Pitch dimension [mm]	10,5
Max. number of valve spaces	16
Operating pressure [bar]	-0.9 to 10
Permission	RCM mark c CSA us (OL) c UL us - Recognized (OL)
Corrosion resistant class KBK	2 - moderate corrosion stress
Max. tightening torque Slot rail assembly [Nm]	1,5
Max. tightening torque Valve fastening [Nm]	0,45
Max. tightening torque wall assembly [Nm]	1,5
Product weight [g]	168
Pneumatic connection 1	M7
Pneumatic connection 3	M7
Pneumatic connection 5	M7
Material information	RoHs compliant
Connection strip material	Aluminium wrought alloy

Support air control connection 12/14	M5
Exhaust control connection 82/84	M5
Pneumatic connection 2	M5
Pneumatic connection 4	M5