

Electrical Connection VAVE-L1-1VS2-LP - Festo 566718

Item no. FES-566718

Manufacturer Festo

EAN 4052568057589

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Corrosion resistance class CRC **0 - No corrosion stressing**

HS-Code **85366990**

Material **Polyamide (PA)**

Mounting position **arbitrary**


Operating voltage **12 V DC**

Protection rating **IP40**

Series **VAVE**

Temperature (max.) **50**

Weight **0.003 kg**

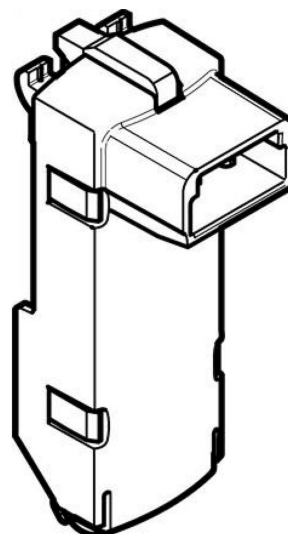

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Reverse polarity protection	Bipolar
Additional functions	Spark suppression
Signal condition display	LED
Nominal operating voltage DC [V]	12 24
Surge voltage strength [kV]	0,8
Degree of contamination	3
Expanded ambient temperature	-5 - 60 °C
Corrosion resistant class KBK	0 - No corrosion stressing
Protection category	IP40
ambient temperature [°C]	-5 to 50
installation position	arbitrary
Product weight [g]	1,5
Electrical connection	2 pin socket / container /
Protection line connection	Not available

Fastening type	Clip
Housing colour	 black
Material information	RoHs compliant
Housing material	PA