

## Sub-Base VMPAL-AP-4X10 - Festo 560981

Item no. FES-560981


Manufacturer Festo

EAN 4052568098469

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

### TECHNICAL DATA

|                         |           |
|-------------------------|-----------|
| Betriebsdruck max [bar] | 10.000000 |
| HS-Code                 | 84819000  |
| Weight                  | 0.125 kg  |

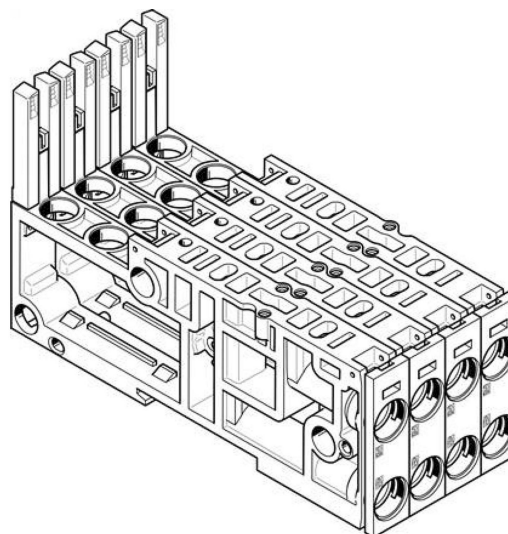

## STANDARDS & COMPLIANCE

ISO 8573-1:2010

## DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

|                                                |                                                           |
|------------------------------------------------|-----------------------------------------------------------|
| Width [mm]                                     | 42,8                                                      |
| Length [mm]                                    | 107,3                                                     |
| Pitch dimension [mm]                           | 10,7                                                      |
| Valve size [mm]                                | 10                                                        |
| Max. number of valve spaces                    | 4                                                         |
| Flow direction                                 | Reversible                                                |
| Valve island structure                         | Valve sizes mixable                                       |
| Operating pressure [bar]                       | -0.9 to 10                                                |
| Control pressure [bar]                         | 3 to 8                                                    |
| Operating medium                               | Compressed air to ISO 8573-1:2010 [7:4:4]                 |
| Information about operating and control medium | Oiled operation possible (required in further operations) |

### esd.equipment

Keldersstr. 15  
42697 Solingen, Deutschland  
VAT ID: DE269659389

Phone: +49 212 38340680  
shop@esd-equipment.com

**esd.equipment**

Page 1/2

|                               |                             |
|-------------------------------|-----------------------------|
| Corrosion resistant class KBK | 3 - severe corrosion stress |
| ambient temperature [°C]      | -5 to 50                    |
| Product weight [g]            | 100,00                      |
| Pneumatic connection 2        | for cartridge 10 mm         |
| Pneumatic connection 4        | for cartridge 10 mm         |
| Material information          | RoHs compliant              |
| Connection plate material     | PA reinforced               |