

Sub-Base VMPAL-AP-4X10-QS5/32"-1 - Festo 561101

Item no. FES-561101


Manufacturer Festo

EAN 4052568208547

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Corrosion resistance class CRC	3 - severe corrosion stress
HS-Code	84819000
Medium	Compressed air
Operating conditions	ISO 8573-1
Series	VMPAL
Temperature (max.)	50
Weight	0.08 kg

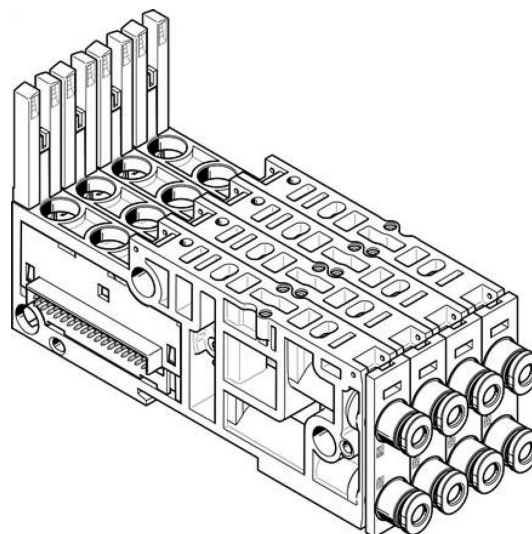

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Width [mm]	42,8
Length [mm]	107,3
Pitch dimension [mm]	10,7
Valve size [mm]	10
Max. number of valve spaces	4
Flow direction	Reversible
Valve island structure	Valve sizes mixable
Operating pressure [bar]	-0.9 to 10
Control pressure [bar]	3 to 8
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Corrosion resistant class KBK	3 - severe corrosion stress
ambient temperature [°C]	-5 to 50
Product weight [g]	110,00
Pneumatic connection 2	For hose exterior diameter 5/32"
Pneumatic connection 4	For hose exterior diameter 5/32"
Material information	RoHs compliant
Connection plate material	PA reinforced
Max. number of valve coils	4