

Push-In T-Connector NEDU-M12D4-M12T4-IS - Festo 562248

Item no. FES-562248

Manufacturer Festo

EAN 4052568099169

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Corrosion resistance class CRC **3 - severe corrosion stress**

Dichtmaterial **FKM**

HS-Code **85366990**

Norm **EN 61076-2-101**


Schutzart **IP65**

Serie **NEDU**

Temperature (max.) **85**

Weight **0.018 kg**

Werkstoff **Zink-Druckguss**

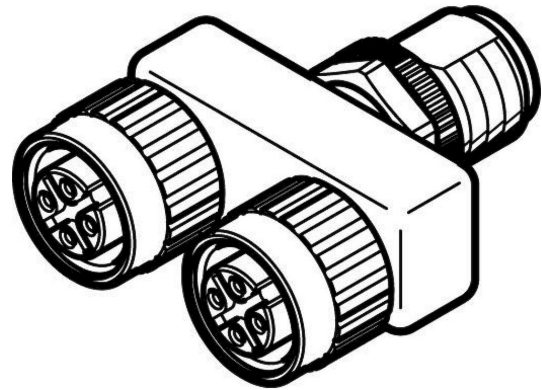

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Based on standard	EN 61076-2-101
Connection frequency	100
Fastening type	Screwable
Product weight [g]	25,5
Electrical connection	M12x1 / M12x1 / M12x1 4 pin / 4 pin / 4 pin A-coded / A-coded / A-coded Socket / socket / plug
Operating voltage range DC [V]	0 to 30
Protection category	IP65 IP67
ambient temperature [°C]	-25 to 85
Material information	RoHs compliant
Corrosion resistant class KBK	3 - severe corrosion stress
Housing material	Zinc pressure cast TPE-U(PU) reinforced
Locking nut material	PA reinforced
Seals material	FPM
Plug contacts material	Copper allow Gold plated