

Plug NECU-L3G8-C2-IS - Festo 565709

Item no. FES-565709


Manufacturer Festo

EAN 4052568100063

Festo pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

HS-Code	85366990
Weight	0.05 kg
Werkstoff	Polyamid (PA)

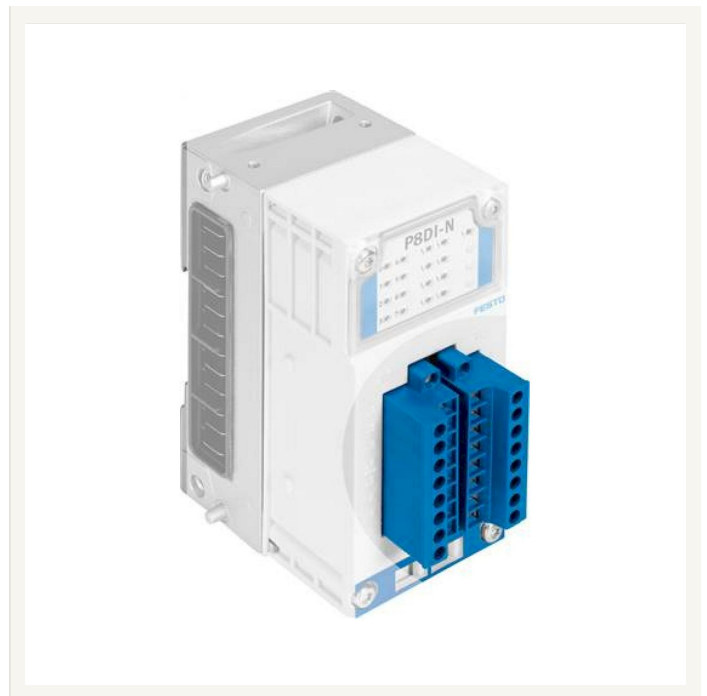

DESCRIPTION

Festo pneumatic component for industrial automation and compressed-air applications in proven quality. The key technical data of this genuine Festo article are listed below.

Operating voltage range DC [V]	0 to 30
Current carrying capacity at 40°C [A]	12,0
Surge voltage strength [kV]	4,0
Connection cross-section [mm²]	0.2 to 2.5
ambient temperature [°C]	-40 to 85
Material information	RoHs compliant
Degree of contamination	3
Corrosion resistant class KBK	2 - moderate corrosion stress
Housing material	PA
Plug contacts material	Copper allow Tin plated
Connection frequency	100
Housing colour	 blue
Electrical connection	8 pin Screw clamp Plug straight
installation position	arbitrary

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/1