

Manifold Rail VABM-L1-18G-G38-9-G - Festo 8004904

Item no. FES-8004904

Manufacturer Festo

EAN 4052568277697

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Corrosion resistance class CRC **2 - moderate corrosion stress**


HS-Code **84819000**

Mounting position **arbitrary**

Pneumatic connection **G3/8**

Series **VABM**

Weight **2.5 kg**

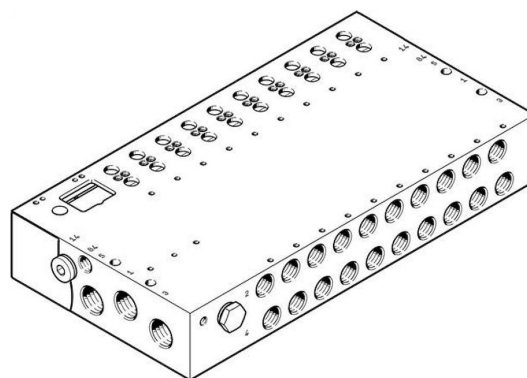

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Pitch dimension [mm]	19,0
Max. number of valve spaces	9
Permission	c CSA us (OL) c UL us - Recognized (OL)
Corrosion resistant class KBK	2 - moderate corrosion stress
Product weight [g]	2.461
Pneumatic connection 1	G3/8
Pneumatic connection 3	G3/8
Pneumatic connection 5	G3/8
Material information	RoHs compliant
Connection strip material	Aluminium wrought alloy
Support air control connection 12/14	G1/8
Exhaust control connection 82/84	G1/8
installation position	arbitrary
Bearing temperature [°C]	-20 to 60