

Parallel Gripper HGPL-14-80-A-B - Festo 3361482

Item no. FES-3361482


Manufacturer Festo

EAN 4052568269197

Festo gripper for secure handling and positioning of workpieces in automated processes.

TECHNICAL DATA

Betriebsdruck max [bar]	8.000000
HS-Code	84798997
Pneumatischer Anschluss	M5
Weight	0.75 kg
Werkstoff	Aluminium

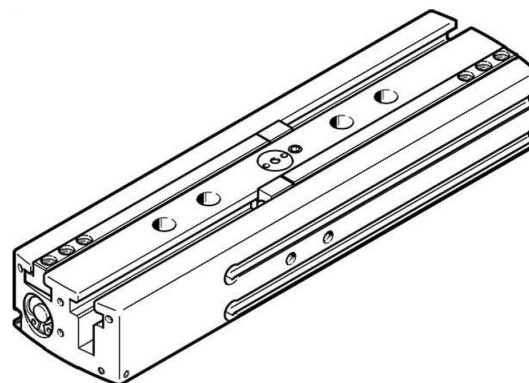

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo gripper for secure handling and positioning of workpieces in automated processes. The key technical data of this genuine Festo article are listed below.

size	14
Stroke per gripper jaw [mm]	80
Max. exchange precision [mm]	< 0,2 mm
Max. gripper jaw play ax, ay [deg]	< 0.2 deg
Max. gripper jaw play Sz [mm]	< 0,05 mm
Rotational symmetry [mm]	<= 0,2 mm
Repeatability grippers [mm]	< 0,03 mm
Quantity Gripper jaws	2
installation position	arbitrary
Principle of operation	double acting
Gripper function	Parallel

esd.equipment

Keldersstr. 15

42697 Solingen, Deutschland

VAT ID: DE269659389

Phone: +49 212 38340680

shop@esd-equipment.com

esd.equipment

Page 1/2

Construction set up	Double piston Guide Piston pusher T-shape Toothed rack/pinion
Position detection	For proximity switch
Open total gripping force at 6 bar [N]	126
Close total gripping force at 6 bar [N]	158
Operating pressure [bar]	3 to 8
Max. working frequency gripper [Hz]	< 1 Hz
Min. opening time a 6 bar [ms]	286
Min. closing time at 6 bar [ms]	270
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	2 - moderate corrosion stress
ambient temperature [°C]	5 to 60
Open gripper jaws at gripping force of 6 bar [N]	63
Close gripper jaws at gripping force at 6 bar [N]	79
Mass inertia [kg/cm²]	21,93
Max. force on gripper jaws Fz static [N]	500
Max. torque on gripper jaws Mx static [Nm]	35
Max. torque on gripper jaws My static [Nm]	35
Max. torque on gripper jaws Mz static [Nm]	35
Lubrication interval guide elements [Mio SP]	5
Max. mass per external griper finger [g]	80
Product weight [g]	720
Fastening type	Female thread and centring sleeve With Throughway bore and centring sleeve
Pneumatic connection	M5
Material information	Copper and PTFE-free RoHs compliant
Housing material	aluminium Smooth anodised
Gripper jaws material	hardened Steel