

Sub-Base VMPA14-IC-AP-S-1 - Festo 8023667

Item no. FES-8023667


Manufacturer Festo

EAN 4052568278885

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Betriebsdruck max [bar]	8.000000
HS-Code	84819000
Pneumatischer Anschluss	G1/8
Weight	0.22 kg

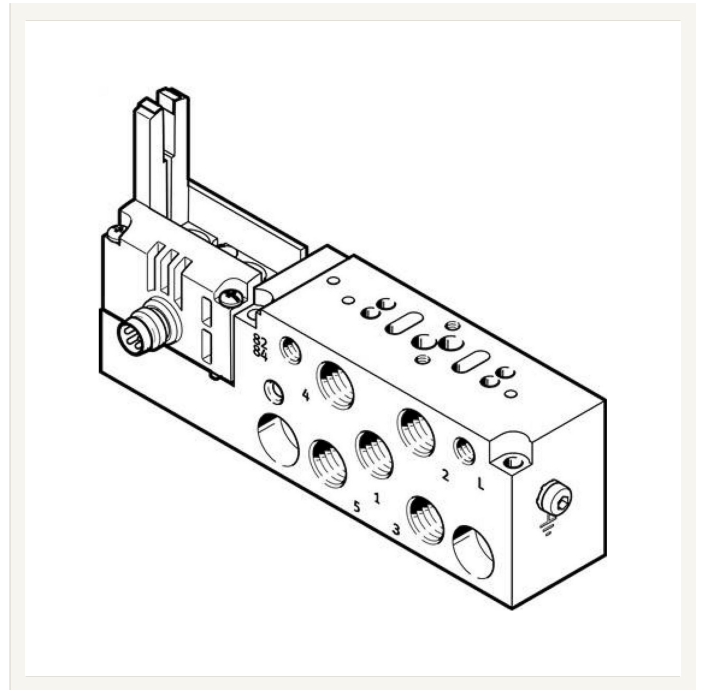

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Product weight [g]	150,0
Material information	RoHs compliant
Width [mm]	24,4
Length [mm]	107,3
Pitch dimension [mm]	14,9
Operating pressure [bar]	3 to 8
Control pressure [bar]	3 to 8
Corrosion resistant class KBK	0 - No corrosion stressing
ambient temperature [°C]	-5 to 50
Pneumatic connection 2	G1/8 M7
Pneumatic connection 4	G1/8 M7
Connection plate material	Aluminium die casting
Pneumatic connection 1	G1/8 M7
Permission	c UL us - Recognized (OL)

KC-mark	KC-EMV
CE certificate (see declaration of conformity)	to EU EMC directive
Electrical connection	M8 Plug
Fastening type connection plate	With throughway bores
Pneumatic connection 3	M7 G1/8
Pneumatic connection 5	G1/8 M7
Support air control connection 12/14	M5
Exhaust control connection 82/84	M5