

Sub-Base VMPAL-AP-20-T135-RV - Festo 8034564

Item no. FES-8034564


Manufacturer Festo

EAN 4052568283698

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections.

TECHNICAL DATA

Betriebsdruck max [bar]	10.000000
Corrosion resistance class CRC	3 - severe corrosion stress
HS-Code	84819000
Medium	Compressed air
Series	VMPAL
Temperature (max.)	50
Weight	0.05 kg

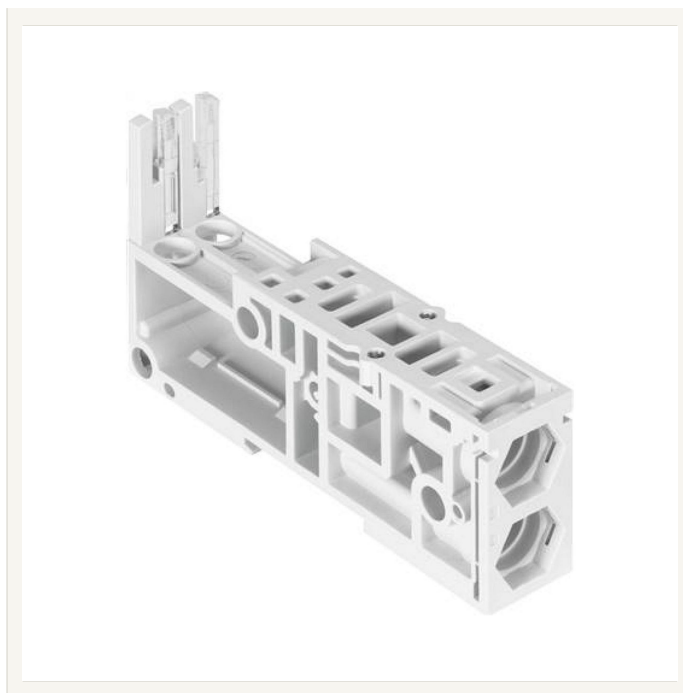

STANDARDS & COMPLIANCE

ISO 8573-1:2010

DESCRIPTION

Festo fitting or line component for fast, leak-tight and pressure-resistant compressed-air connections. The key technical data of this genuine Festo article are listed below.

Width [mm]	21,2
Length [mm]	107,3
Pitch dimension [mm]	21,2
Max. number of valve spaces	1
Flow direction	Not reversible
Valve island structure	Valve sizes mixable
Operating pressure [bar]	0 to 10
Control pressure [bar]	3 to 8
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Information about operating and control medium	Oiled operation possible (required in further operations)
Corrosion resistant class KBK	3 - severe corrosion stress

esd.equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com

esd.equipment

Page 1/2

ambient temperature [°C]	-5 to 50
Product weight [g]	50,00
Pneumatic connection 2	for cartridge 18 mm
Pneumatic connection 4	for cartridge 18 mm
Material information	RoHs compliant
Connection plate material	PA reinforced
Pressure zone separation	Channel 1, 3 and 5
Integrated function	check valves
Build.width [mm]	20
Vacuum capable	no